

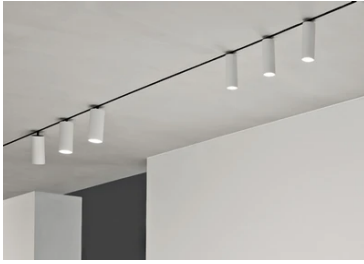


## UT Pro Wall-Washer Dali Version GA-600

■ 09.7505.14.DA - Black

Wall-Washer lighting module to be installed in standard 3-phase track with LED light source. 220-240V power supply integrated. DALI version requires dimmable tracks (please refer to the "Tracks" chapter).

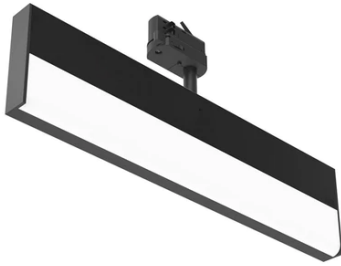


### Main specifications

<b>Number of heads</b>	1	<b>Environment</b>	Indoor dry location
<b>Lamp category</b>	LED		
<b>Power (W)</b>	25.2W		
<b>Net lumen (lm)</b>	1700		
<b>Mountings</b>	Track		

### Optical

<b>Lighting type</b>	Direct
<b>LED type</b>	Top LED
<b>Light distribution</b>	Asymmetric
<b>Optical type</b>	Wall-washer
<b>Beam angle (°)</b>	36
<b>Beam angle C90-270 (°)</b>	75

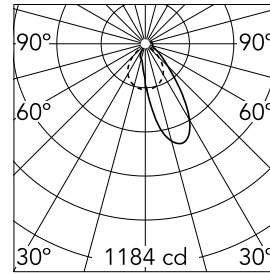

<b>Beam Angle:</b>	36°		
<b>h(m)</b>	<b>E(lx)</b>	<b>D(m)</b>	
1	1184	0.76	
2	296	1.52	
3	132	2.28	
4	74	3.04	
5	47	3.80	

Luminous flux luminaire  
1700 lm

### Electrical

<b>Frequency (Hz)</b>	50/60	<b>Emergency</b>	Without
<b>Voltage (V)</b>	220.00	<b>Insulation class</b>	I
<b>Dimmable</b>	Yes		
<b>Driver</b>	Integrated		
<b>Driver type</b>	Non Dimmable, Dimmable DALI		
	1		

### Physical

<b>Color</b>	Black	<b>Length (mm)</b>	420
<b>Orientation</b>	Adjustable		
<b>Weight (kg)</b>	1.05		
<b>Tilt (°)</b>	15		
<b>Rotation (°)</b>	360		

