



## UT Spot Track Ø 57 GA

■ 09.7705.14A - Black


Spotlight to be installed on 3-phase track with LED light source. 220-240V, 50-60Hz power supply integrated.

### Main specifications

|                        |       |                       |                     |
|------------------------|-------|-----------------------|---------------------|
| <b>Number of heads</b> | 1     | <b>Net lumen (lm)</b> | 1216                |
| <b>Lamp category</b>   | LED   | <b>Mountings</b>      | Track               |
| <b>Power (W)</b>       | 23.5W | <b>Environment</b>    | Indoor dry location |
| <b>CCT (K)</b>         | 4000K |                       |                     |
| <b>CRI</b>             | 90    |                       |                     |

### Optical


|                               |           |
|-------------------------------|-----------|
| <b>Lighting type</b>          | Direct    |
| <b>LED type</b>               | LED array |
| <b>Light distribution</b>     | Symmetric |
| <b>Optical type</b>           | Flood     |
| <b>Beam angle (°)</b>         | 42        |
| <b>Beam angle C90-270 (°)</b> | 42        |



Beam Angle: 42°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 2879  | 0.76 |
| 2    | 720   | 1.52 |
| 3    | 320   | 2.28 |
| 4    | 180   | 3.05 |
| 5    | 115   | 3.81 |

Luminous flux luminaire  
1216 lm

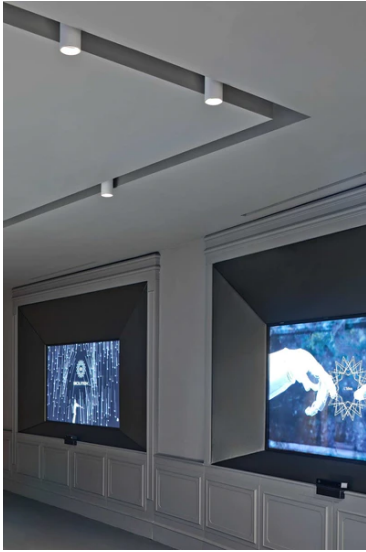


### Electrical

|                       |              |                         |    |
|-----------------------|--------------|-------------------------|----|
| <b>Frequency (Hz)</b> | 50/60        | <b>Insulation class</b> | II |
| <b>Dimmable</b>       | No           |                         |    |
| <b>Driver</b>         | Integrated   |                         |    |
| <b>Driver type</b>    | Non Dimmable |                         |    |
| <b>Emergency</b>      | Without      |                         |    |

### Physical

|                     |            |                           |    |
|---------------------|------------|---------------------------|----|
| <b>Color</b>        | Black      | <b>Spot diameter (mm)</b> | 57 |
| <b>Orientation</b>  | Adjustable |                           |    |
| <b>Weight (kg)</b>  | 0.57       |                           |    |
| <b>Tilt (°)</b>     | 90         |                           |    |
| <b>Rotation (°)</b> | 360        |                           |    |



### Note

Screening crosspiece, lenses and Honeycomb directly installable on the head of the luminaire without needing any fastening accessory. FLOS three-phase lighting track luminaires are designed and fully tested for tracks recommended by FLOS. Compatibility is guaranteed with three-phase track produced by Nordic Aluminium. Compatibility with Eutrac under request.



## UT Spot Track Ø 57 GA



---

Snoot shielding cone  
08.0526.00



---

Snoot shielding cone  
08.0526.BW



---

Snoot shielding cone  
08.0526.40




---

Honeycomb  
08.8428.00



---

Screening crosspiece  
08.8429.00



---

Elliptical lens  
08.8431.00



---

Flood lens  
08.8432.00