



## UT Spot Track Ø 57 GA Dali Version

■ 09.7704.14ADA - Black


Spotlight to be installed on 3-phase track with LED light source. 220-240V, 50-60Hz power supply integrated.

### Main specifications

|                  |       |                |                     |
|------------------|-------|----------------|---------------------|
| Number of heads  | 1     | CRI            | 80                  |
| Lamp category    | LED   | Net lumen (lm) | 1394                |
| Power (W)        | 23.5W | Mountings      | Track               |
| System power (W) | 23.2  | Environment    | Indoor dry location |
| CCT (K)          | 3000K |                |                     |

### Optical

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| LED type               | LED array |
| Light distribution     | Symmetric |
| Optical type           | Flood     |
| Beam angle (°)         | 42        |
| Beam angle C90-270 (°) | 42        |



Beam Angle: 42°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 3301  | 0.76 |
| 2    | 825   | 1.52 |
| 3    | 367   | 2.28 |
| 4    | 206   | 3.05 |
| 5    | 132   | 3.81 |

Luminous flux luminaire  
1394 lm

### Electrical




|                |            |                  |                 |
|----------------|------------|------------------|-----------------|
| Frequency (Hz) | 50/60      | Driver type      | Dimmable DALI 1 |
| Voltage (V)    | 220-240V   | Emergency        | Without         |
| Current (mA)   | 550        | Insulation class | II              |
| Dimmable       | Yes        |                  |                 |
| Driver         | Integrated |                  |                 |

### Physical


|              |            |                    |    |
|--------------|------------|--------------------|----|
| Color        | Black      | Spot diameter (mm) | 57 |
| Orientation  | Adjustable |                    |    |
| Weight (kg)  | 0.57       |                    |    |
| Tilt (°)     | 90         |                    |    |
| Rotation (°) | 360        |                    |    |

### Note

Screening crosspiece, lenses and Honeycomb directly installable on the head of the luminaire without needing any fastening accessory. FLOS three-phase lighting track luminaires are designed and fully tested for tracks recommended by FLOS. Compatibility is guaranteed with three-phase track produced by Nordic Aluminium. Compatibility with Eutrac under request. FLOS three-phase DALI track luminaires are designed for Pulse DALI from Nordic Aluminium.

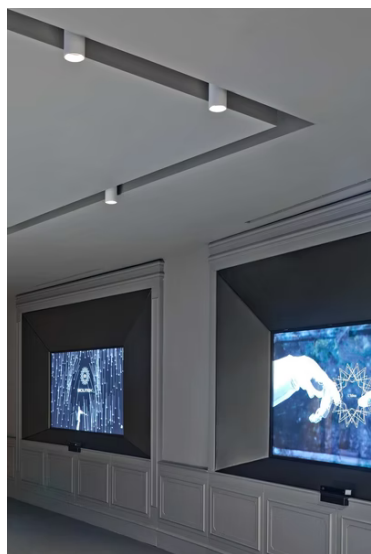

UT Spot Track Ø 57 GA Dali Version



---

Elliptical lens  
08.8431.00

---

Snoot shielding cone  
08.0526.BW

---

Honeycomb  
08.8428.00



---

Flood lens  
08.8432.00

---

Snoot shielding cone  
08.0526.40

---

Snoot shielding cone  
08.0526.00



---

Screening crosspiece  
08.8429.00