



UT Spot Track Ø 57 GA Dali Version All White

■ 09.7704.30AYU - White


Spotlight to be installed on 3-phase track with LED light source. 220-240V, 50-60Hz power supply integrated. In the "All white" versions, the track adapter, the arm, the rear of the head and the head are white. Only the anti-glare ring is black.

Main specifications

Number of heads	1	CRI	80
Lamp category	LED	Net lumen (lm)	1394
Power (W)	23.5W	Mountings	Track
System power (W)	23.2	Environment	Indoor dry location
CCT (K)	3000K		

Optical


Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Flood
Beam angle (°)	42
Beam angle C90-270 (°)	42



Beam Angle: 42°

h(m)	E(lx)	D(m)
1	3301	0.76
2	825	1.52
3	367	2.28
4	206	3.05
5	132	3.81

Luminous flux luminaire
1394 lm

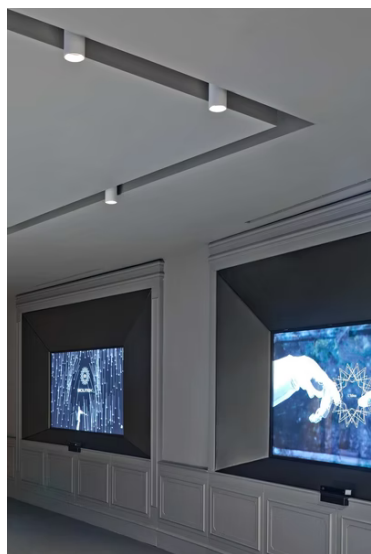

Electrical



Frequency (Hz)	50/60	Driver type	Dimmable DALI 1
Voltage (V)	220-240V	Emergency	Without
Current (mA)	550	Insulation class	II
Dimmable	Yes		
Driver	Integrated		

Physical


Color	White	Spot diameter (mm)	57
Orientation	Adjustable		
Weight (kg)	0.57		
Tilt (°)	90		
Rotation (°)	360		

Note

Screening crosspiece, lenses and Honeycomb directly installable on the head of the luminaire without needing any fastening accessory. FLOS three-phase lighting track luminaires are designed and fully tested for tracks recommended by FLOS. Compatibility is guaranteed with three-phase track produced by Nordic Aluminium. Compatibility with Eutrac under request. FLOS three-phase DALI track luminaires are designed for Pulse DALI from Nordic Aluminium.



UT Spot Track Ø 57 GA Dali Version All White



Snoot shielding cone
08.0526.BW

Honeycomb
08.8428.00

Elliptical lens
08.8431.00



Flood lens
08.8432.00

Screening crosspiece
08.8429.00

Snoot shielding cone
08.0526.40



Snoot shielding cone
08.0526.00