



## UT Spot Track Ø 57 GA Dali Version All White

■ 09.7706.30AYU - White


Spotlight to be installed on 3-phase track with LED light source. 220-240V, 50-60Hz power supply integrated. In the "All white" versions, the track adapter, the arm, the rear of the head and the head are white. Only the anti-glare ring is black.

### Main specifications

Number of heads	1	CRI	90
Lamp category	LED	Net lumen (lm)	997
Power (W)	23.5W	Mountings	Track
System power (W)	23.2	Environment	Indoor dry location
CCT (K)	3000K		

### Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	10
Beam angle C90-270 (°)	10



Beam Angle: 10°

h(m)	E(lx)	D(m)
1	11643	0.18
2	2911	0.36
3	1294	0.54
4	728	0.72
5	466	0.90

Luminous flux luminaire  
997 lm

### Electrical




Frequency (Hz)	50/60	Driver type	Dimmable DALI 1
Voltage (V)	220-240V	Emergency	Without
Current (mA)	550	Insulation class	II
Dimmable	Yes		
Driver	Integrated		

### Physical


Color	White	Spot diameter (mm)	57
Orientation	Adjustable		
Weight (kg)	0.57		
Tilt (°)	90		
Rotation (°)	360		

### Note

Screening crosspiece, lenses and Honeycomb directly installable on the head of the luminaire without needing any fastening accessory. FLOS three-phase lighting track luminaires are designed and fully tested for tracks recommended by FLOS. Compatibility is guaranteed with three-phase track produced by Nordic Aluminium. Compatibility with Eutrac under request. FLOS three-phase DALI track luminaires are designed for Pulse DALI from Nordic Aluminium.

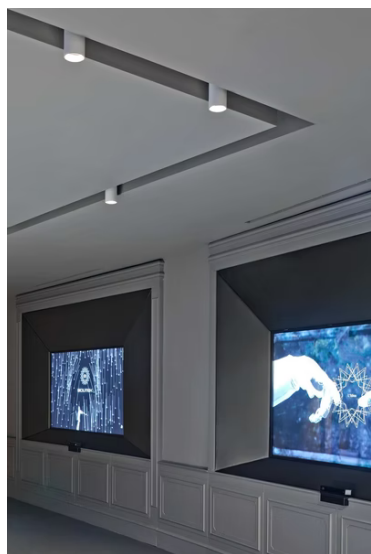

UT Spot Track Ø 57 GA Dali Version All White



Elliptical lens  
08.8431.00

Snoot shielding cone  
08.0526.BW

Honeycomb  
08.8428.00



Flood lens  
08.8432.00

Snoot shielding cone  
08.0526.40

Snoot shielding cone  
08.0526.00



Screening crosspiece  
08.8429.00