



## UT Spot Track Ø 86 GA

■ 09.7730.14 - Black


Spotlight to be installed on 3-phase track with LED light source. 220-240V, 50-60Hz power supply integrated.

### Main specifications

Number of heads	1	CRI	80
Lamp category	LED	Net lumen (lm)	2216
Power (W)	27	Mountings	Track
System power (W)	29.3	Environment	Indoor dry location
CCT (K)	4000K		

### Optical


Lighting type	Direct
LED type	Phosphor LED
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	17
Beam angle C90-270 (°)	17



Beam Angle: 17°

h(m)	E(lx)	D(m)
1	16217	0.29
2	4054	0.58
3	1802	0.88
4	1014	1.17
5	649	1.46

Luminous flux luminaire  
2216 lm

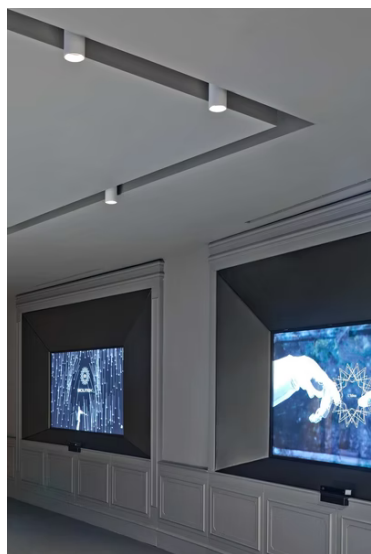

### Electrical



Frequency (Hz)	50/60	Driver type	Non Dimmable
Voltage (V)	220-240V	Emergency	Without
Current (mA)	900	Insulation class	II
Dimmable	No		
Driver	Integrated		

### Physical

Color	Black	Spot diameter (mm)	86
Orientation	Adjustable		
Weight (kg)	0.75		
Tilt (°)	90		
Rotation (°)	360		

### Note

Screening crosspiece, lenses and Honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with Honeycomb + Lense at the same time. FLOS three-phase lighting track luminaires are designed and fully tested for tracks recommended by FLOS. Compatibility is guaranteed with three-phase track produced by Nordic Aluminium. Compatibility with Eutrac under request.



UT Spot Track Ø 86 GA



---

Screening crosspiece  
08.8411.00

---

Holding ring  
08.8410.00