UT Spot Track Ø 86 GA

09.7734.14A - Black

Spotlight to be installed on 3-phase track with LED light source. 220-240V, 50-60Hz power supply integrated.

Main specifications

Number of heads	1	**CRI**	98
Lamp category	LED	**Net lumen (lm)**	1808
Power (W)	27	**Mountings**	Track
System power (W)	29.7	**Environment**	Indoor dry location
CCT (K)	3000K		

Optical

Lighting type	Direct
LED type	Phosphor LED
Light distribution	Symmetric
Optical type	Medium
Beam angle (°)	23
Beam angle C90-270 (°)	23



Luminous flux luminaire
1808 lm

Beam Angle: 23°

h(m)	E(lx)	D(m)
1	8403	0.41
2	2101	0.82
3	934	1.23
4	525	1.64
5	336	2.05

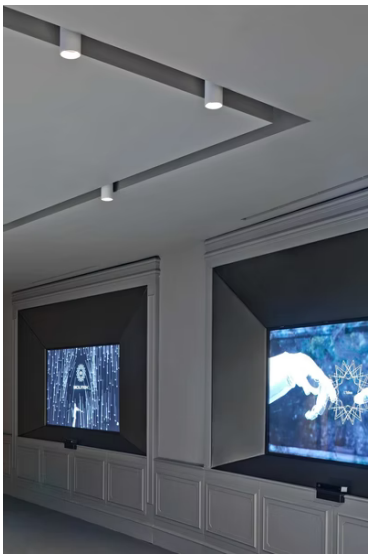

Electrical

Frequency (Hz)	50/60	**Driver type**	Non Dimmable
Voltage (V)	220-240V	**Emergency**	Without
Current (mA)	900	**Insulation class**	II
Dimmable	No		
Driver	Integrated		



Physical

Color	Black	**Spot diameter (mm)**	86
Orientation	Adjustable		
Weight (kg)	0.75		
Tilt (°)	90		
Rotation (°)	360		

Note

Screening crosspiece, lenses and Honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with Honeycomb + Lense at the same time. FLOS three-phase lighting track luminaires are designed and fully tested for tracks recommended by FLOS. Compatibility is guaranteed with three-phase track produced by Nordic Aluminium. Compatibility with Eutrac under request.

IP 20 RETILAP GWT 850°

UT Spot Track Ø 86 GA

Screening crosspiece
08.8411.00

Holding ring
08.8410.00