



UT Spot Track Ø 86 GA

■ 09.7734.14A - Black


Spotlight to be installed on 3-phase track with LED light source. 220-240V, 50-60Hz power supply integrated.

Main specifications

Number of heads	1	Net lumen (lm)	1808
Lamp category	LED	Mountings	Track
Power (W)	26.5W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	98		


Optical

Lighting type	Direct
LED type	Phosphor LED
Light distribution	Symmetric
Optical type	Medium
Beam angle (°)	23
Beam angle C90-270 (°)	23



Beam Angle:	23°	
h(m)	E(lx)	D(m)
1	8403	0.41
2	2101	0.82
3	934	1.23
4	525	1.64
5	336	2.05

Luminous flux luminaire
1808 lm

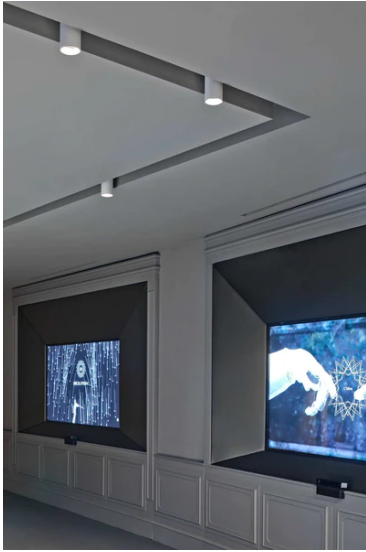

Electrical


Frequency (Hz)	50/60	Driver type	Non Dimmable
Voltage (V)	220	Emergency	Without
Current (mA)	900	Insulation class	II
Dimmable	No		
Driver	Integrated		

Physical

Color	Black	Spot diameter (mm)	86
Orientation	Adjustable		
Weight (kg)	0.75		
Tilt (°)	90		
Rotation (°)	360		

Note

Screening crosspiece, lenses and Honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with Honeycomb + Lense at the same time. FLOS three-phase lighting track luminaires are designed and fully tested for tracks recommended by FLOS. Compatibility is guaranteed with three-phase track produced by Nordic Aluminium. Compatibility with Eutrac under request.



UT Spot Track Ø 86 GA



Holding ring
08.8410.00



Screening crosspiece
08.8411.00