UT Spot Track Ø 86 GA

09.7758.14A - Black

Spotlight to be installed on 3-phase track with LED light source. 220-240V, 50-60Hz power supply integrated.

Main specifications

Number of heads	1	**CRI**	90
Lamp category	LED	**Net lumen (lm)**	1991
Power (W)	33W	**Mountings**	Track
System power (W)	33	**Environment**	Indoor dry location
CCT (K)	3000K		

Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Flood
Beam angle (°)	37
Beam angle C90-270 (°)	37



Luminous flux luminaire
1991 lm

Beam Angle: 37°

h(m)	E(lx)	D(m)
1	5566	0.67
2	1392	1.34
3	618	2.01
4	348	2.69
5	223	3.36

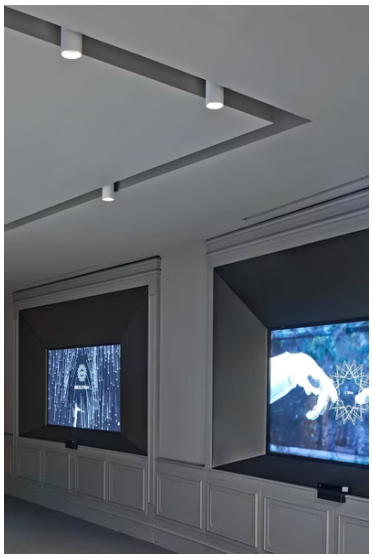

Electrical

Frequency (Hz)	50/60	**Driver type**	Non Dimmable
Voltage (V)	220-240V	**Emergency**	Without
Current (mA)	900	**Insulation class**	II
Dimmable	No		
Driver	Integrated		



Physical

Color	Black	**Spot diameter (mm)**	86
Orientation	Adjustable		
Weight (kg)	0.75		
Tilt (°)	90		
Rotation (°)	360		

Note

Screening crosspiece, lenses and Honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with Honeycomb + Lense at the same time. FLOS three-phase lighting track luminaires are designed and fully tested for tracks recommended by FLOS. Compatibility is guaranteed with three-phase track produced by Nordic Aluminium. Compatibility with Eutrac under request.

IP 20 RETILAP GWT 850°

UT Spot Track Ø 86 GA

Flood lens
08.8175.68

Elliptical lens
08.8163.68

Honeycomb
08.8495.14

Screening crosspiece
08.8411.00

Holding ring
08.8410.00