



## UT Spot Track Ø 86 GA All White

09.7733.30.78 - White


Spotlight to be installed on 3-phase track with LED light source. 220-240V, 50-60Hz power supply integrated. In the "All white" versions, the track adapter, the arm, the rear of the head and the head are white. Only the anti-glare ring is black.

### Main specifications

|                        |       |                       |                     |
|------------------------|-------|-----------------------|---------------------|
| <b>Number of heads</b> | 1     | <b>Net lumen (lm)</b> | 1648                |
| <b>Lamp category</b>   | LED   | <b>Mountings</b>      | Track               |
| <b>Power (W)</b>       | 26.5W | <b>Environment</b>    | Indoor dry location |
| <b>CCT (K)</b>         | 3000K |                       |                     |
| <b>CRI</b>             | 98    |                       |                     |


### Optical

|                               |              |
|-------------------------------|--------------|
| <b>Lighting type</b>          | Direct       |
| <b>LED type</b>               | Phosphor LED |
| <b>Light distribution</b>     | Symmetric    |
| <b>Optical type</b>           | Spot         |
| <b>Beam angle (°)</b>         | 16           |
| <b>Beam angle C90-270 (°)</b> | 16           |



|                    |              |             |  |
|--------------------|--------------|-------------|--|
| <b>Beam Angle:</b> | 16°          |             |  |
| <b>h(m)</b>        | <b>E(lx)</b> | <b>D(m)</b> |  |
| 1                  | 12488        | 0.28        |  |
| 2                  | 3122         | 0.55        |  |
| 3                  | 1388         | 0.83        |  |
| 4                  | 781          | 1.10        |  |
| 5                  | 500          | 1.38        |  |

Luminous flux luminaire  
1648 lm

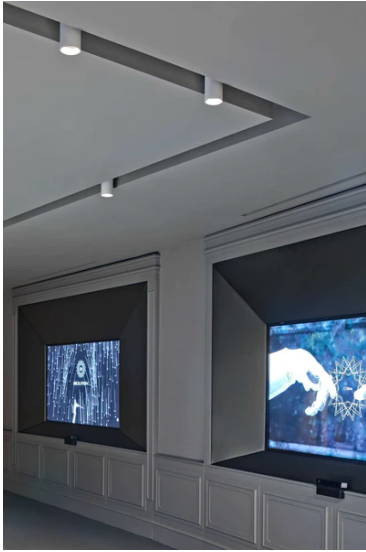

### Electrical


|                       |              |                         |    |
|-----------------------|--------------|-------------------------|----|
| <b>Frequency (Hz)</b> | 50/60        | <b>Insulation class</b> | II |
| <b>Dimmable</b>       | No           |                         |    |
| <b>Driver</b>         | Integrated   |                         |    |
| <b>Driver type</b>    | Non Dimmable |                         |    |
| <b>Emergency</b>      | Without      |                         |    |

### Physical

|                     |            |                           |    |
|---------------------|------------|---------------------------|----|
| <b>Color</b>        | White      | <b>Spot diameter (mm)</b> | 86 |
| <b>Orientation</b>  | Adjustable |                           |    |
| <b>Weight (kg)</b>  | 0.75       |                           |    |
| <b>Tilt (°)</b>     | 90         |                           |    |
| <b>Rotation (°)</b> | 360        |                           |    |

### Note

Screening crosspiece, lenses and Honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with Honeycomb + Lense at the same time. FLOS three-phase lighting track luminaires are designed and fully tested for tracks recommended by FLOS. Compatibility is guaranteed with three-phase track produced by Nordic Aluminium. Compatibility with Eutrac under request.




## UT Spot Track Ø 86 GA All White



---

Screening crosspiece  
08.8411.00



---

Holding ring  
08.8410.00