



UT Spot Track Ø 86 GA All White

09.7734.30A78 - White


Spotlight to be installed on 3-phase track with LED light source. 220-240V, 50-60Hz power supply integrated. .30 versions come with the track adapter, the arm and the rear of the head in black.

Main specifications

Number of heads	1	Net lumen (lm)	1808
Lamp category	LED	Mountings	Track
Power (W)	26.5W	Environment	Indoor dry location
CCT (K)	3000K		
CRI	98		


Optical

Lighting type	Direct
LED type	Phosphor LED
Light distribution	Symmetric
Optical type	Medium
Beam angle (°)	23
Beam angle C90-270 (°)	23



Beam Angle:	23°	
h(m)	E(lx)	D(m)
1	8403	0.41
2	2101	0.82
3	934	1.23
4	525	1.64
5	336	2.05

Luminous flux luminaire
1808 lm

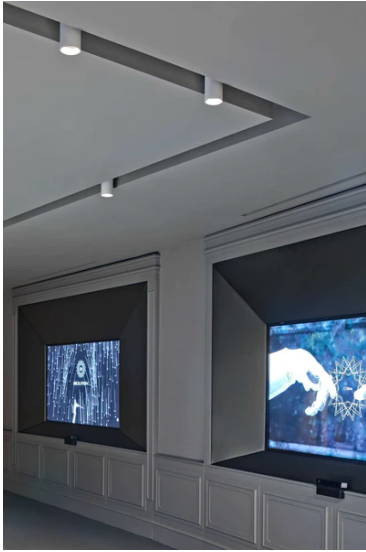

Electrical


Frequency (Hz)	50/60	Driver type	Non Dimmable
Voltage (V)	220	Emergency	Without
Current (mA)	900	Insulation class	II
Dimmable	Yes		
Driver	Integrated		

Physical

Color	White
Orientation	Adjustable
Weight (kg)	0.75
Rotation (°)	360
Spot diameter (mm)	86

Note

Screening crosspiece, lenses and Honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with Honeycomb + Lense at the same time. FLOS three-phase lighting track luminaires are designed and fully tested for tracks recommended by FLOS. Compatibility is guaranteed with three-phase track produced by Nordic Aluminium. Compatibility with Eutrac under request. FLOS three-phase DALI track luminaires are designed for Pulse DALI from Nordic Aluminium.



UT Spot Track Ø 86 GA All White



Holding ring
08.8410.00

Screening crosspiece
08.8411.00