



UT Spot Track Ø 86 GA All White

■ 09.7756.30A78 - White


Spotlight to be installed on 3-phase track with LED light source. 220-240V, 50-60Hz power supply integrated. In the "All white" versions, the track adapter, the arm, the rear of the head and the head are white. Only the anti-glare ring is black.

Main specifications

| | | | |
|-------------------------|-------|-----------------------|---------------------|
| Number of heads | 1 | CRI | 90 |
| Lamp category | LED | Net lumen (lm) | 2190 |
| Power (W) | 33W | Mountings | Track |
| System power (W) | 33 | Environment | Indoor dry location |
| CCT (K) | 3000K | | |

Optical

| | |
|-------------------------------|-----------|
| Lighting type | Direct |
| LED type | LED array |
| Light distribution | Symmetric |
| Optical type | Spot |
| Beam angle (°) | 12 |
| Beam angle C90-270 (°) | 12 |

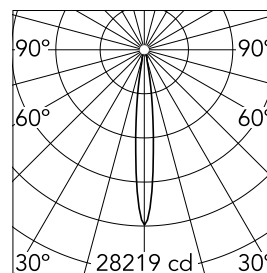

Beam Angle: 12°

h(m) E(lx) D(m)

1 28219 0.21


2 7055 0.41

3 3135 0.62

4 1764 0.82

5 1129 1.03

Luminous flux luminaire
2190 lm

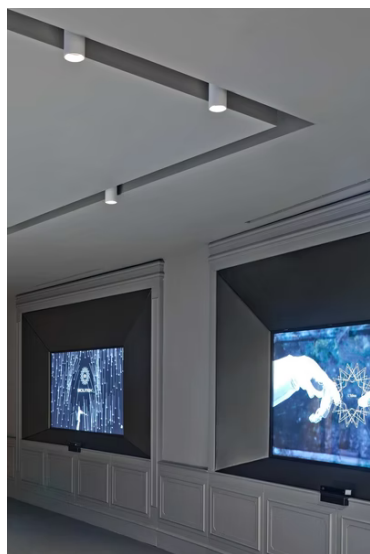

Electrical



| | | | |
|-----------------------|------------|-------------------------|--------------|
| Frequency (Hz) | 50/60 | Driver type | Non Dimmable |
| Voltage (V) | 220-240V | Emergency | Without |
| Current (mA) | 900 | Insulation class | II |
| Dimmable | No | | |
| Driver | Integrated | | |

Physical

| | | | |
|---------------------|------------|---------------------------|----|
| Color | White | Spot diameter (mm) | 86 |
| Orientation | Adjustable | | |
| Weight (kg) | 0.75 | | |
| Tilt (°) | 90 | | |
| Rotation (°) | 360 | | |

Note

Screening crosspiece, lenses and Honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with Honeycomb + Lense at the same time. FLOS three-phase lighting track luminaires are designed and fully tested for tracks recommended by FLOS. Compatibility is guaranteed with three-phase track produced by Nordic Aluminium. Compatibility with Eutrac under request.



UT Spot Track Ø 86 GA All White



Holding ring
08.8410.00



Elliptical lens
08.8163.68



Screening crosspiece
08.8411.00



Honeycomb
08.8495.14



Flood lens
08.8175.68