UT Spot Track Ø 86 GA Dali Version

09.7730.14.DA - Black

Spotlight to be installed on 3-phase track with LED light source. 220-240V, 50-60Hz power supply integrated.

Main specifications

Number of heads	1	**CRI**	80
Lamp category	LED	**Net lumen (lm)**	2216
Power (W)	27	**Mountings**	Track
System power (W)	29.3	**Environment**	Indoor dry location
CCT (K)	4000K		

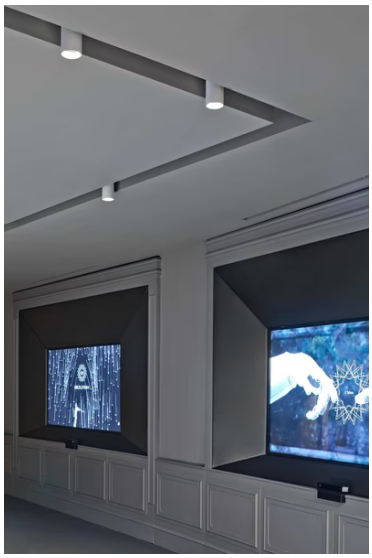

Optical

Lighting type	Direct
LED type	Phosphor LED
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	17
Beam angle C90-270 (°)	17



Luminous flux luminaire
2216 lm

Beam Angle: 17°

h(m)	E(lx)	D(m)
1	16217	0.29
2	4054	0.58
3	1802	0.88
4	1014	1.17
5	649	1.46

Electrical

Frequency (Hz)	50/60	**Driver type**	Dimmable DALI 1
Voltage (V)	220-240V	**Emergency**	Without
Current (mA)	900	**Insulation class**	II
Dimmable	Yes		
Driver	Integrated		



Physical

Color	Black	**Spot diameter (mm)**	86
Orientation	Adjustable		
Weight (kg)	0.75		
Tilt (°)	90		
Rotation (°)	360		

Note

Screening crosspiece, lenses and Honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with Honeycomb + Lense at the same time. FLOS three-phase lighting track luminaires are designed and fully tested for tracks recommended by FLOS. Compatibility is guaranteed with three-phase track produced by Nordic Aluminium. Compatibility with Eutrac under request. FLOS three-phase DALI track luminaires are designed for Pulse DALI from Nordic Aluminium.

IP 20 | RETILAP | GWT 850°

UT Spot Track Ø 86 GA Dali Version

Screening crosspiece
08.8411.00

Holding ring
08.8410.00