



## UT Spot Track Ø 86 GA Dali Version

09.7755.30ADA - White


Spotlight to be installed on 3-phase track with LED light source. 220-240V, 50-60Hz power supply integrated. .30 versions come with the track adapter, the arm and the rear of the head in black.

### Main specifications

<b>Number of heads</b>	1	<b>Net lumen (lm)</b>	2074
<b>Lamp category</b>	LED	<b>Mountings</b>	Track
<b>Power (W)</b>	33W	<b>Environment</b>	Indoor dry location
<b>CCT (K)</b>	4000K		
<b>CRI</b>	90		

### Optical

<b>Lighting type</b>	Direct
<b>LED type</b>	LED array
<b>Light distribution</b>	Symmetric
<b>Optical type</b>	Flood
<b>Beam angle (°)</b>	37
<b>Beam angle C90-270 (°)</b>	37




Beam Angle: 37°

h(m) E(lx) D(m)

1	5799	0.67
2	1450	1.34
3	644	2.01
4	362	2.69
5	232	3.36

Luminous flux luminaire  
2074 lm

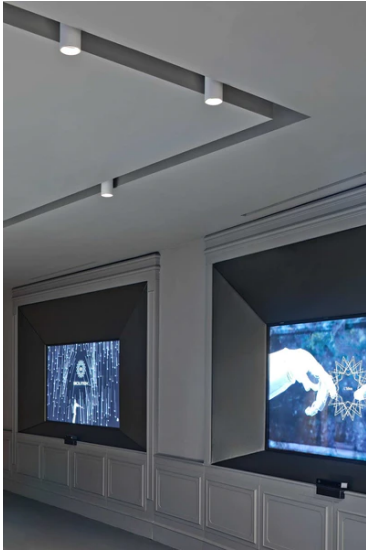

### Electrical


<b>Frequency (Hz)</b>	50/60	<b>Insulation class</b>	II
<b>Dimmable</b>	Yes		
<b>Driver</b>	Integrated		
<b>Driver type</b>	Dimmable DALI		
	1		
<b>Emergency</b>	Without		

### Physical

<b>Color</b>	White	<b>Spot diameter (mm)</b>	86
<b>Orientation</b>	Adjustable		
<b>Weight (kg)</b>	0.75		
<b>Tilt (°)</b>	90		
<b>Rotation (°)</b>	360		

### Note

Screening crosspiece, lenses and Honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with Honeycomb + Lense at the same time. FLOS three-phase lighting track luminaires are designed and fully tested for tracks recommended by FLOS. Compatibility is guaranteed with three-phase track produced by Nordic Aluminium. Compatibility with Eutrac under request. FLOS three-phase DALI track luminaires are designed for Pulse DALI from Nordic Aluminium.



## UT Spot Track Ø 86 GA Dali Version



---

Honeycomb  
08.8495.14



---

Flood lens  
08.8175.68



---

Elliptical lens  
08.8163.68



---

Screening crosspiece  
08.8411.00



---

Holding ring  
08.8410.00