



UT Spot Track Ø 86 GA Dali Version

■ 09.7757.14ADA - Black


Spotlight to be installed on 3-phase track with LED light source. 220-240V, 50-60Hz power supply integrated.

Main specifications

| | | | |
|------------------|-------|----------------|---------------------|
| Number of heads | 1 | CRI | 90 |
| Lamp category | LED | Net lumen (lm) | 2089 |
| Power (W) | 33W | Mountings | Track |
| System power (W) | 33 | Environment | Indoor dry location |
| CCT (K) | 3000K | | |

Optical


| | |
|------------------------|-----------|
| Lighting type | Direct |
| LED type | LED array |
| Light distribution | Symmetric |
| Optical type | Medium |
| Beam angle (°) | 24 |
| Beam angle C90-270 (°) | 24 |

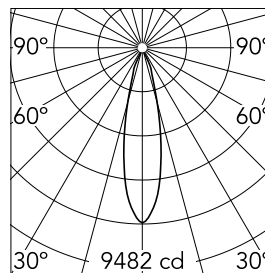

Beam Angle: 24°

| | h(m) | E(lx) | D(m) |
|---|------|-------|------|
| 1 | 9482 | 0.43 | |
| 2 | 2370 | 0.86 | |
| 3 | 1054 | 1.28 | |
| 4 | 593 | 1.71 | |
| 5 | 379 | 2.14 | |

Luminous flux luminaire
2089 lm

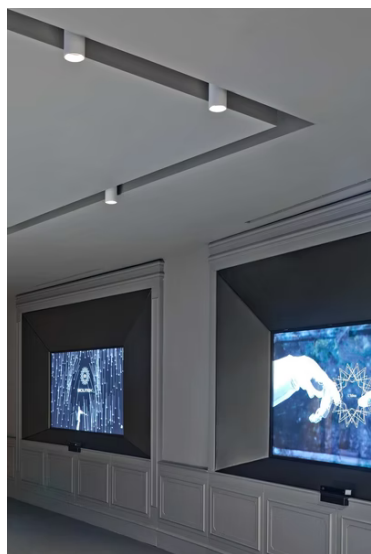

Electrical



| | | | |
|----------------|------------|------------------|-----------------|
| Frequency (Hz) | 50/60 | Driver type | Dimmable DALI 1 |
| Voltage (V) | 220-240V | Emergency | Without |
| Current (mA) | 900 | Insulation class | II |
| Dimmable | Yes | | |
| Driver | Integrated | | |

Physical

| | | | |
|--------------|------------|--------------------|----|
| Color | Black | Spot diameter (mm) | 86 |
| Orientation | Adjustable | | |
| Weight (kg) | 0.75 | | |
| Tilt (°) | 90 | | |
| Rotation (°) | 360 | | |

Note

Screening crosspiece, lenses and Honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with Honeycomb + Lense at the same time. FLOS three-phase lighting track luminaires are designed and fully tested for tracks recommended by FLOS. Compatibility is guaranteed with three-phase track produced by Nordic Aluminium. Compatibility with Eutrac under request. FLOS three-phase DALI track luminaires are designed for Pulse DALI from Nordic Aluminium.



UT Spot Track Ø 86 GA Dali Version



Honeycomb
08.8495.14



Flood lens
08.8175.68



Holding ring
08.8410.00



Elliptical lens
08.8163.68



Screening crosspiece
08.8411.00