UT Spot Track Wall-Washer Ø 86 GA

09.7771.14A - Black

Spotlight to be installed on 3-phase track with LED light source. 220-240V, 50-60Hz power supply integrated.

Main specifications

Number of heads	1	**CRI**	90
Lamp category	LED	**Net lumen (lm)**	2116
Power (W)	33W	**Mountings**	Track
System power (W)	33	**Environment**	Indoor dry location
CCT (K)	3000K		

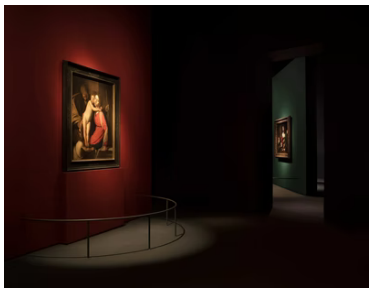

Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Wall Washer Down
Beam angle (°)	50
Beam angle C90-270 (°)	50



Luminous flux luminaire
2116 lm

Beam Angle: 50°

h(m)	E(lx)	D(m)
1	2146	0.98
2	537	1.97
3	238	2.95
4	134	3.94
5	86	4.92



Electrical

Frequency (Hz)	50/60	**Driver type**	Non Dimmable
Voltage (V)	220-240V	**Emergency**	Without
Current (mA)	900	**Insulation class**	II
Dimmable	No		
Driver	Integrated		

Physical

Color	Black	**Spot diameter (mm)**	86
Orientation	Adjustable		
Weight (kg)	1.05		
Tilt (°)	90		
Rotation (°)	360		

IP 20 · RETILAP · GWT 850°

Note

Screening crosspiece, lenses and Honeycomb directly installable on the head of the luminaire without needing any fastening accessory. Installation compatible with Honeycomb + Lense at the same time. FLOS three-phase lighting track luminaires are designed and fully tested for tracks recommended by FLOS. Compatibility is guaranteed with three-phase track produced by Nordic Aluminium. Compatibility with Eutrac under request.