



Vertical Light Large

■ SA.3016.1C - Raw


Recessed sign luminaire for indoor application. 100/240V power supply source included.

Main specifications

| | | | |
|----------------------|---------------|--------------------|---------------------|
| Lamp category | LED | Environment | Indoor dry location |
| Power (W) | 1W | | |
| CCT (K) | 3000K | | |
| CRI | 90 | | |
| Mountings | Wall recessed | | |

Optical



| | |
|-------------------------------|----------------|
| Lighting type | Indirect |
| Light distribution | Symmetric |
| Optical type | Diffused light |
| Beam angle (°) | 49 |
| Beam angle C90-270 (°) | 23 |



Beam Angle: 23°

| h(m) | E(lx) | D(m) |
|------|-------|-------|
| 1 | 12 | 9.80 |
| 2 | 3 | 19.60 |
| 3 | 1 | 29.40 |
| 4 | 1 | 39.20 |
| 5 | 0 | 49.00 |

Luminous flux luminaire
43 lm

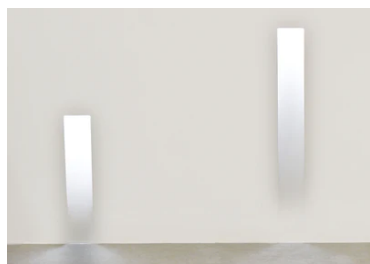

Electrical

| | |
|-------------------------|------------|
| Dimmable | No |
| Driver | Integrated |
| Emergency | Without |
| Insulation class | II |

Physical

| | |
|--------------------|-------|
| Color | Raw |
| Orientation | Fixed |
| Weight (kg) | 4 |

