



Wall Piercing 1x

SA.5020.6.120 - White


Soft technology semi-recessed luminaire for ceiling or wall mounting. Available in white LED or RGB versions.
Control gear not included.

Main specifications

Lamp category	LED
Power (W)	7.4W
Mountings	Recessed
Environment	Indoor dry location

Optical



Lighting type	Direct
LED type	LED RGB
Light distribution	Symmetric
Optical type	Diffused light

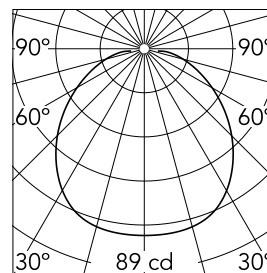

Beam Angle: 111°

h(m)	E(lx)	D(m)
1	89	2.93
2	22	5.86
3	10	8.79
4	6	11.72
5	4	14.65

Luminous flux luminaire
274 lm

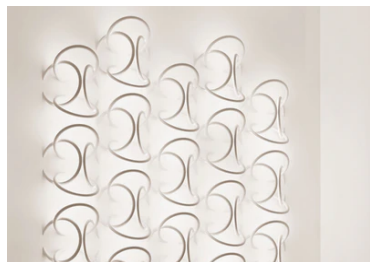

Electrical

Voltage (V)	24.00
Dimmable	No
Driver	Remote excluded
Emergency	Without

Physical

Color	White
Orientation	Fixed
Weight (kg)	4

Note

LED modules included. For power supply and dimming interface see LED drivers.

