

## Zero Track Surface Profile

### ■ 06.2500.18 - Deep Brown

Electro-mechanical indoor profile for surface installation (ceiling or wall). To be fixed with specific screw plugs that come with the profile.

#### Main specifications

<b>Mountings</b>	Surface
<b>Environment</b>	Indoor dry location

#### Electrical

<b>Voltage (V)</b>	24	<b>Insulation class</b>	III
<b>Dimmable</b>	Yes		
<b>Driver</b>	Remote excluded		
<b>Driver type</b>	Non Dimmable, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1		
<b>Emergency</b>	Without		

#### Physical

<b>Color</b>	Deep Brown
<b>Weight (kg)</b>	0.21
<b>Length (mm)</b>	1000

#### Note

It is necessary to order the power connector, intermediate connectors and covers separately. Feed unit connectors available as 90° flat corner and curve (symmetric element for left/right corner), ceiling/wall - wall/wall inner corner, as well as "T" and "X" shape. For vertical installations, installing the stopper is mandatory. It must be ordered separately.

PWM voltage output dimmable drivers shall be used at frequencies between 250 and 500Hz.



## Zero Track Surface Profile



---

Power supply surface middle. 57W –  
220/240V  
06.2511.14



---

Zero Track Surface Profile. T-shaped  
connector  
06.2545.18



---

Zero Track Surface Profile.  
Intermediate Connector  
06.2506.40



---

Zero Track Surface Profile. Cross-  
shaped connector  
06.2546.18



---

Zero Track Surface Profile. Feed  
intermediate connector  
06.2541.14



---

Zero Track Surface Profile. Ceiling/wall  
– wall/wall inner corner  
06.2543.18



---

Zero Track Surface Profile. 90° Flat  
Corner  
06.2542.40



---

Power supply surface middle. 57W –  
220/240V  
06.2511.06



---

Zero Track Surface Profile.  
Intermediate Connector  
06.2506.14



---

Zero Track Surface Profile. Feed Unit for Remote Power Supply Unit  
06.2540.CZ



---

Zero Track Surface Profile. T-shaped connector  
06.2545.14



---

24V Remote power supply. Dimmable through 1/10V protocol or Non Dimmable. 25W 110/240V  
60.9359



---

24V Remote power supply. Dimmable through 1/10V protocol or Non Dimmable. 57W 220/240V  
60.9361



---

Zero Track Surface Profile. 90° Flat Corner  
06.2542.18




---

Power supply surface end. 57W – 220/240V  
06.2510.06



---

Power supply surface middle. 57W – 220/240V  
06.2511.40

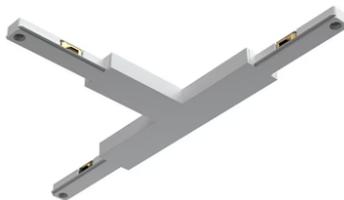

---

Zero Track Surface Profile. T-shaped connector  
06.2545.40



---

Zero Track Surface Profile. Interior ceiling/ceiling-wall/wall curve  
06.2544.14




---

Zero Track Surface Profile. End Cap  
06.2509.40



---

Zero Track Surface Profile. Feed  
intermediate connector  
06.2541.18

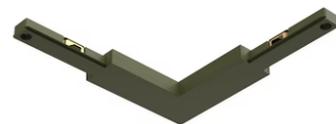

---

Zero Track Surface Profile. 90° Flat  
Corner  
06.2542.CZ




---

Zero Track Surface Profile. End Cap  
06.2509.14



---

Power supply surface middle. 57W –  
220/240V  
06.2511.18

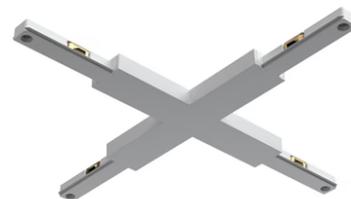

---

Zero Track Surface Profile. Cross-  
shaped connector  
06.2546.40



---

Zero Track Surface Profile. Interior  
ceiling/ceiling-wall/wall curve  
06.2544.40



---

Stopper  
08.0630.14



---

Power supply surface end. 57W –  
220/240V  
06.2510.18



Zero Track Surface Profile. Feed intermediate connector  
06.2541.CZ



24V Remote power supply. Dimmable through 1/10V protocol. 120W 110/240V  
60.9416



Zero Track Surface Profile. Feed Unit for Remote Power Supply Unit  
06.2540.14




Zero Track Surface Profile. Ceiling/wall - wall/wall inner corner  
06.2543.14



Power supply surface end. 57W - 220/240V  
06.2510.14



Casambi Controller 220-240V. Remote Installation  
60.9392

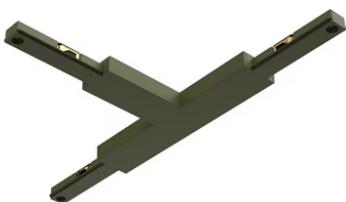

Zero Track Surface Profile. T-shaped connector  
06.2545.CZ



Remote Power Supply Non Dimmable 24V. 120W. 220/240V  
60.9516



Zero Track Surface Profile. Interior ceiling/ceiling-wall/wall curve  
06.2544.18






---

24V Remote power supply. Dimmable through 1/10V protocol or Non Dimmable. Dimming range 20-100%. 36W-110V / 45W-240V  
60.9360




---

24V Remote power supply. Dimmable through DALI protocol. 120W 110/240V  
60.9426

---

Power supply surface end. 57W – 220/240V  
06.2510.CZ

---

Zero Track Surface Profile. Cross-shaped connector  
06.2546.14




---


Zero Track Surface Profile. Ceiling/wall – wall/wall inner corner  
06.2543.CZ

---

Zero Track Surface Profile. 90° Flat Corner  
06.2542.14

---

Zero Track Surface Profile. Interior ceiling/ceiling-wall/wall curve  
06.2544.CZ

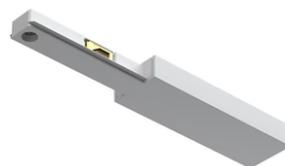

---

Power supply surface end. 57W –  
220/240V  
06.2510.40

---

Zero Track Surface Profile. Feed Unit  
for Remote Power Supply Unit  
06.2540.40



---

Stopper  
06.2542.40



---

Zero Track Surface Profile. Cross-  
shaped connector  
06.2546.CZ

---

Zero Track Surface Profile. Feed Unit  
for Remote Power Supply Unit  
06.2540.18

---

Zero Track Surface Profile. Ceiling/wall  
– wall/wall inner corner  
06.2543.40