


## Johnny 120 Semi-Recessed 2L Square – Housing

■ 08.0507.40 - Weiss

LED Einbauleuchte. Ohne Netzgerät. Es wird ein Gerät als Lichtquelle benötigt.

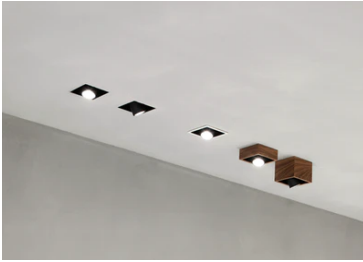

### Hauptspezifikationen



|             |                     |
|-------------|---------------------|
| Halterungen | Decke,<br>eingebaut |
| Umgebung    | Innenbeleuchtung    |

### Elektrisch

|                  |      |
|------------------|------|
| Notfall          | Ohne |
| Isolationsklasse | III  |

### Physikalisch

|              |       |
|--------------|-------|
| Farbe        | Weiss |
| Gewicht (kg) | 0.30  |



## Johnny 120 Semi-Recessed 2L Square – Housing



Honeycomb  
08.8428.00



Continuous current power supply of  
13-20W, 110/240V – 50/60Hz with power  
current selected through adjustable  
300 mA – 15W / 350 mA – 18W /  
400/450/500/550/600/  
650/700/750/800/850/900 mA – 15W.  
switch. 0/1-10V or push dimming  
60.9188



Snoot shielding cone  
08.0526.BW



Continuous current power supply of  
10-20W, 110/240V – 50/60Hz with power  
current selected through adjustable  
250 mA – 10W / 350 mA – 15W / 400 mA  
– 17W / 450 mA – 19W / 500/550/600/700  
mA – 20W, Dali 1 switch.  
60.8847



Flood lens  
08.8432.00



Continuous current power supply  
220/240V – 50/60Hz. Adjustable Current  
300mA-13W / 350mA-15W / 400mA-18W  
/ 450mA-20W / 500mA-22W / 550mA-  
24W / 600mA-27W / 650mA-29W /  
700mA-31W / 750mA-32W / 800mA-33W  
/ 850mA-35W / 900mA-38W / 950mA-  
40W / 1000/1050mA-42W  
60.9162




---

Elliptical lens  
08.8431.00




---

Snoot shielding cone  
08.0526.00




---

Snoot shielding cone  
08.0526.40




---

Continuous current power supply.  
230/240V – 50/60Hz. Adjustable Current  
350mA – 17W / 500mA – 24W / 700/ 750  
mA – 32W switch by trailing and  
leading edge dimming, mains dimming  
or push dimming  
60.8534




---

Continuous current power supply of  
18W, 220/240V – 50/60Hz with 450 mA  
supply voltage Mains dimming, trailing  
edge  
60.9268