


Johnny 120 Semi-Recessed 2L Square – Housing

■ 08.0557.TK - Teak-Holz

LED Einbauleuchte. Ohne Netzgerät. Es wird ein Gerät als Lichtquelle benötigt.

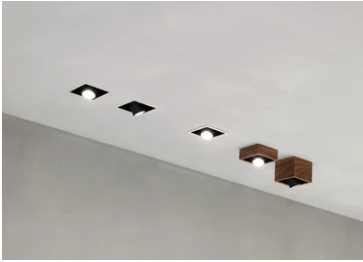

Hauptspezifikationen



Halterungen	Decke, eingebaut
Umgebung	Innenbeleuchtung

Elektrisch

Notfall	Ohne
Isolationsklasse	III

Physikalisch

Farbe	Teak-Holz
Gewicht (kg)	0.30



Johnny 120 Semi-Recessed 2L Square – Housing



Continuous current power supply.
230/240V – 50/60Hz. Adjustable Current
350mA – 17W / 500mA – 24W / 700/ 750
mA – 32W switch by trailing and
leading edge dimming, mains dimming
or push dimming
60.8534

Flood lens
08.8432.00

Continuous current power supply of
18W, 220/240V – 50/60Hz with 450 mA
supply voltage Mains dimming, trailing
edge
60.9268



Honeycomb
08.8428.00

Continuous current power supply of
10-20W, 110/240V – 50/60Hz with power
current selected through adjustable
250 mA – 10W / 350 mA – 15W / 400 mA
– 17W / 450 mA – 19W / 500/550/600/700
mA – 20W, Dali 1 switch.
60.8847

Continuous current power supply of
13-20W, 110/240V – 50/60Hz with power
current selected through adjustable
300 mA – 15W / 350 mA – 18W /
400/450/500/550/600/
650/700/750/800/850/900 mA – 15W.
switch. 0/1-10V or push dimming
60.9188



Snoot shielding cone
08.0526.00



Elliptical lens
08.8431.00



Snoot shielding cone
08.0526.BW



Continuous current power supply
220/240V – 50/60Hz. Adjustable Current
300mA-13W / 350mA-15W / 400mA-18W
/ 450mA-20W / 500mA-22W / 550mA-
24W / 600mA-27W / 650mA-29W /
700mA-31W / 750mA-32W / 800mA-33W
/ 850mA-35W / 900mA-38W / 950mA-
40W / 1000/1050mA-42W
60.9162



Snoot shielding cone
08.0526.40