



## Light Shadow Pro Ø 90 Fixed Optic Flood

Neues Produkt

03.9922.06 - Chrom


LED-Beleuchtungsmodul mit geringer Blendung für die Einsetzung in Einbaurahmen (nicht inbegriffen).  
Installation mittels Bajonettsystem mit austauschbaren Spots. Remote-Treiber nicht enthalten.

### Hauptspezifikationen

|                   |       |                 |                  |
|-------------------|-------|-----------------|------------------|
| Anzahl an Köpfen  | 1     | Nettolumen (lm) | 2018             |
| Leuchtenkategorie | LED   | Halterungen     | Recessed         |
| Leistung (W)      | 22W   | Umgebung        | Innenbeleuchtung |
| CCT (K)           | 4000K |                 |                  |
| CRI               | 90    |                 |                  |

### Optisch

|                        |               |
|------------------------|---------------|
| Beleuchtungstyp        | Direkt        |
| LED-Typ                | LED-Anordnung |
| Light distribution     | Symmetrisch   |
| Optiktyp               | Scheinwerfer  |
| Strahlungswinkel (°)   | 39            |
| Beam angle C90-270 (°) | 39            |

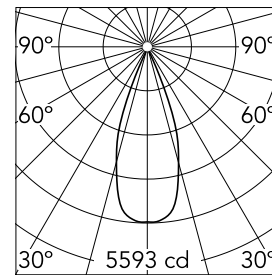

Beam Angle: 39°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 5593  | 0.70 |
| 2    | 1398  | 1.40 |
| 3    | 621   | 2.10 |
| 4    | 350   | 2.81 |
| 5    | 224   | 3.51 |

Luminous flux luminaire  
2018 lm

### Elektrisch



|             |                                                                                                                                                                                                 |                  |     |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|-----|
| Strom (mA)  | 600                                                                                                                                                                                             | Isolationsklasse | III |
| Dimmbar     | Yes                                                                                                                                                                                             |                  |     |
| Treiber     | remote<br>Ausgeschlossen                                                                                                                                                                        |                  |     |
| Treiber-Typ | nicht<br>dimmbarer ,<br>Dimmable DALI<br>2, Elektronisch<br>dimmbar,<br>Electronic<br>dimmbare<br>CASAMBI,<br>Elektronisch<br>dimmbar 1-10 V,<br>Elektronisch<br>dimmbar DALI,<br>Triac<br>Ohne |                  |     |
| Notfall     | Ohne                                                                                                                                                                                            |                  |     |

### Physikalisch

|                            |       |
|----------------------------|-------|
| Farbe                      | Chrom |
| Ausrichtung                | fest  |
| Einbautiefe (mm)           | 129   |
| Lichtfleckdurchmesser (mm) | 90    |

### Note

Bitte wählen Sie 500 mA Einstellung im Remote-Treiber, um die Leistung der "Adjustable" Version zu entsprechen.

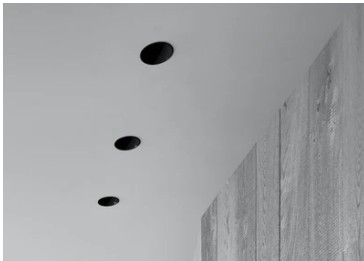

## Light Shadow Pro Ø 90 Fixed Optic Flood



Continuous current power supply,  
Mains dimming, leading & trailing edge  
220/240V – 50/60Hz, 300mA-14W /  
350mA-17W / 400mA-19W /  
450/500/600/650/700/750/800/900mA –  
20W  
60.9467

Continuous current power supply of  
25W, 110/240V – 50/60Hz with power  
current selected through adjustable  
350 mA-18W / 400 mA – 21W / 500mA –  
25W / 600mA – 30W / 700/750/900 mA –  
32W switch. 1-10V or push dimming,  
synchronisation cables not included.  
60.8533

Continuous current power supply of  
12-20W, 110/240V – 50/60Hz with power  
current selected through adjustable  
350mA – 17W / 400mA – 19W / 450 / 550  
/ 600 / 700mA – 20W regulable Dali 1 y  
Dali 2  
60.9222



Continuous current power supply,  
dimmable Casambi 220/240V-50/60Hz,  
300mA-16W / 350mA-18,5W / 400mA-  
21,5W / 450mA-24W / 500mA-27W /  
600mA-32W / 650mA-35W / 700mA-36W  
/ 750/800/900/1000/1050mA – 38W  
60.9207

Installation Frame No Trim  
08.0193.00

Non dimmable continuous current  
power supply of 24W, 110/277V –  
50/60Hz, with power current selected  
through adjustable 500 mA/600 mA  
switch  
60.9523



Installation Frame Trim  
08.0161.40



Installation Frame Trim  
08.0161.14



Continuous current supply source 240V  
– 50/60Hz with dimmable DALI 2, push  
dimming. 300mA-16W / 350mA-18W /  
400mA-21W / 500mA-27W / 600mA-32W  
/ 650mA-35W  
700/750/800/900/950/1000/1050mA-38W  
60.9186



Continuous current power supply, 0/1-  
10V dimmable, 220/240V – 50/60Hz,  
300mA-16W / 350mA-18W / 400mA-21W  
/ 500mA-27W / 600mA-32W / 650mA-  
35W /  
700/750/800/900/950/1000/1050mA-36W  
60.9439



Continuous current power supply  
220/240V – 50/60Hz. Adjustable Current  
300mA-13W / 350mA-15W / 400mA-18W  
/ 450mA-20W / 500mA-22W / 550mA-  
24W / 600mA-27W / 650mA-29W /  
700mA-31W / 750mA-32W / 800mA-33W  
/ 850mA-35W / 900mA-38W / 950mA-  
40W / 1000/1050mA-42W  
60.9162