

03.9501.40 - Weiss

## Hauptspezifikationen

Optisch


Luminous flux lumineuse  
5472 lm

|                  |      |
|------------------|------|
| Notfall          | Ohne |
| Isolationsklasse | III  |

|                       |        |
|-----------------------|--------|
| Farbe                 | Weiss  |
| Ausrichtung           | fest   |
| Gewicht (kg)          | 1.45   |
| Länge (mm)            | 1500   |
| Lebensdauer (L70 B10) | L80B50 |

Kabel 4,25 m


Super Line Up&Down Direct



Recessed Kit 60W. Non Dimmable  
08.0522.40



Remote Power Supply Kit 60W. Dali  
Version  
08.0525.14



Recessed Kit 60W. Dali Version  
08.0523.02



Remote Power Supply Kit 60W. Dali  
Version  
08.0525.40




Remote Power Supply Kit 60W. Dali  
Version  
08.0525.02




Remote Power Supply Kit 60W. Non  
Dimmable  
08.0524.14




Remote Power Supply Kit 60W. Non  
Dimmable  
08.0524.40




Recessed Kit 60W. Dali Version  
08.0523.14




Surface Kit 60W. Non Dimmable  
08.0520.02




Surface Kit 60W. Non Dimmable  
08.0520.40



Surface Kit 60W. Dali Version  
08.0521.02




Recessed Kit 60W. Non Dimmable  
08.0522.14




Surface Kit 60W. Dali Version  
08.0521.40




Remote Power Supply Kit 60W. Non  
Dimmable  
08.0524.02

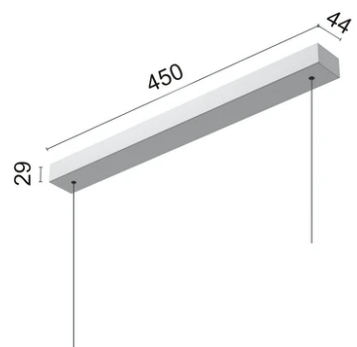


Surface Kit 60W. Dali Version  
08.0521.14



Recessed Kit 60W. Non Dimmable  
08.0522.02



Recessed Kit 60W. Dali Version  
08.0523.40

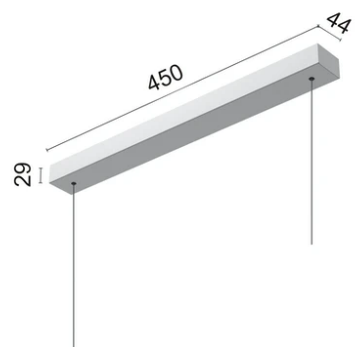

Surface Kit 60W. Non Dimmable  
08.0520.14