

The Running Magnet Suspension Down Feed Unit Profile

■ 06.1626.14 - Schwarz

Elektromechanische Schiene für hängende Anlagen. Gerade Schienen in zwei Ausführungen erhältlich: Einspeisungsprofile für Anschluss an einen Antrieb und Zwischenprofile.

Hauptspezifikationen

Halterungen	Aufhängung
Umgebung	Innenbeleuchtung

Elektrisch

Spannung (V)	24.00
Treiber	remote Ausgeschlossen
Treiber-Typ	nicht dimmbarer , Electronic dimmbable CASAMBI, Elektronisch dimmbar DALI Ohne

Notfall

Physikalisch

Farbe	Schwarz
Gewicht (kg)	2.80
Länge (mm)	1000

Note

Einspeisungsprofile mit Abdeckungen. Alle geraden Einspeisungs- oder Zwischenelemente mit Zubehör für den Netzanschluss (4,2 m langes Netzkabel) und Deckenaufhängung (4 m langes Stahlseil). Für Anschluss an Antrieb ausgestattet. The inner part of the profile is always supplied in black.




The Running Magnet Suspension Down Feed Unit Profile




Surface rose
08.8883.14A

LED power supply source for remote installation in 24V/200W electric control panel. To avoid problems of overload it is recommended to install a power source every 185W. 100/240V. 60.9352

Recessed power supply rose
08.8889.14

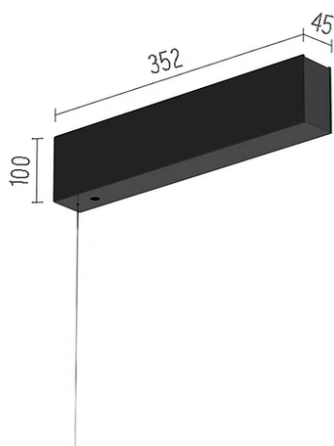

DALI controller and 24V/185W equipment to supply and control both the direct and indirect lighting, included
08.8886.14.DA

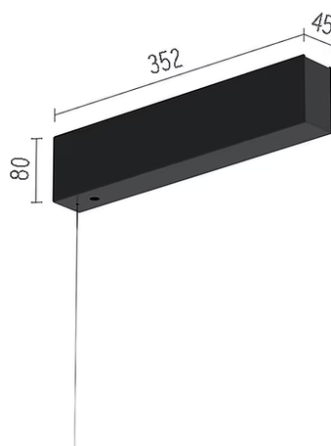

Surface power supply for direct and indirect lighting with housing for the driver
08.8886.14