

The Running Magnet Suspension Down Feed Unit Profile

■ 06.1629.14 - Schwarz

Elektromechanische Schiene für hängende Anlagen. Gerade Schienen in zwei Ausführungen erhältlich: Einspeisungsprofile für Anschluss an einen Antrieb und Zwischenprofile.

Hauptspezifikationen

Halterungen	Aufhängung
Umgebung	Innenbeleuchtung

Elektrisch

Spannung (V)	24.00
Treiber	remote Ausgeschlossen
Treiber-Typ	nicht dimmbarer , Electronic dimmbare CASAMBI, Elektronisch dimmbare DALI Ohne
Notfall	

Physikalisch


Farbe	Schwarz
Gewicht (kg)	7.00
Länge (mm)	2500

Note

Einspeisungsprofile mit Abdeckungen. Alle geraden Einspeisungs- oder Zwischenelemente mit Zubehör für den Netzanschluss (4,2 m langes Netzkabel) und Deckenaufhängung (4 m langes Stahlseil). Für Anschluss an Antrieb ausgestattet. The inner part of the profile is always supplied in black.




The Running Magnet Suspension Down Feed Unit Profile

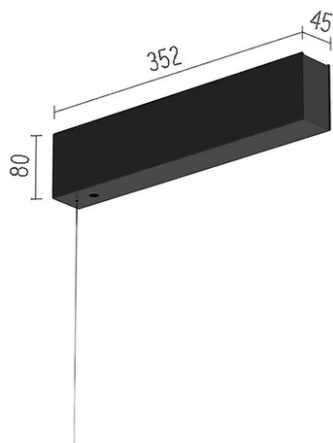

Surface power supply for direct and indirect lighting with housing for the driver
08.8886.14



Surface rose
08.8883.14A

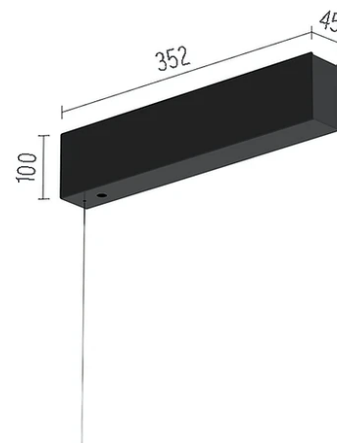

DALI controller and 24V/185W equipment to supply and control both the direct and indirect lighting, included
08.8886.14.DA



LED power supply source for remote installation in 24V/200W electric control panel. To avoid problems of overload it is recommended to install a power source every 185W. 100/240V.
60.9352



Recessed power supply rose
08.8889.14