

## The Running Magnet Suspension Down Feed Unit Profile

### ■ 06.1630.14 - Schwarz

Elektromechanische Schiene für hängende Anlagen. Gerade Schienen in zwei Ausführungen erhältlich: Einspeisungsprofile für Anschluss an einen Antrieb und Zwischenprofile.

#### Hauptspezifikationen

|                    |                  |
|--------------------|------------------|
| <b>Halterungen</b> | Aufhängung       |
| <b>Umgebung</b>    | Innenbeleuchtung |

#### Elektrisch

|                     |                                                                                                     |
|---------------------|-----------------------------------------------------------------------------------------------------|
| <b>Spannung (V)</b> | 24.00                                                                                               |
| <b>Treiber</b>      | remote<br>Ausgeschlossen                                                                            |
| <b>Treiber-Typ</b>  | nicht<br>dimmbarer ,<br>Electronic<br>dimmbable<br>CASAMBI,<br>Elektronisch<br>dimmbar DALI<br>Ohne |

#### Notfall

#### Physikalisch

|                     |         |
|---------------------|---------|
| <b>Farbe</b>        | Schwarz |
| <b>Gewicht (kg)</b> | 8.40    |
| <b>Länge (mm)</b>   | 3000    |

#### Note

Einspeisungsprofile mit Abdeckungen. Alle geraden Einspeisungs- oder Zwischenelemente mit Zubehör für den Netzanschluss (4,2 m langes Netzkabel) und Deckenaufhängung (4 m langes Stahlseil). Für Anschluss an Antrieb ausgestattet. The inner part of the profile is always supplied in black.



## The Running Magnet Suspension Down Feed Unit Profile




Recessed power supply rose  
08.8889.14




Surface rose  
08.8883.14A



LED power supply source for remote installation in 24V/200W electric control panel. To avoid problems of overload it is recommended to install a power source every 185W. 100/240V. 60.9352

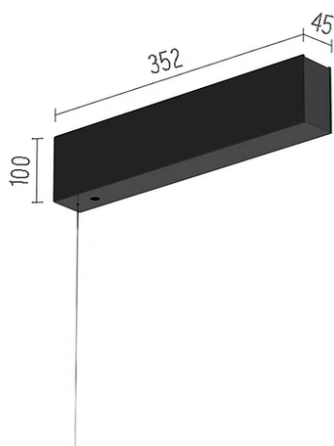

DALI controller and 24V/185W equipment to supply and control both the direct and indirect lighting, included  
08.8886.14.DA

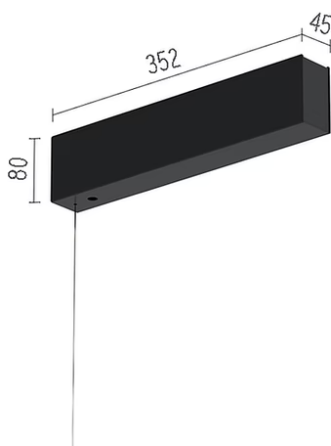

Surface power supply for direct and indirect lighting with housing for the driver  
08.8886.14