



## The Tracking Magnet Surface/Suspension Profile Casambi / Dali / 1-10V compatible

06.5010.05 - Hochglänzendes Aluminium

Elektromechanische Profile für Aufputzmontage oder zum Aufhängen mit einer Länge von 1m bis 3m.

### Hauptspezifikationen

<b>Halterungen</b>	Oberfläche und Aufhängung
<b>Umgebung</b>	Innenbeleuchtung

### Elektrisch


<b>Spannung (V)</b>	48
<b>Dimmbar</b>	Yes
<b>Treiber</b>	remote
<b>Treiber-Typ</b>	Ausgeschlossen Electronic dimmable CASAMBI, Elektronisch dimmbar 1-10 V, Elektronisch dimmbar DALI
<b>Notfall</b>	Ohne

### Physikalisch

<b>Farbe</b>	Hochglänzendes Aluminium
<b>Gewicht (kg)</b>	1.22
<b>Länge (mm)</b>	1000

### Note

Kompatible Version mit On Board Dimmer Leuchten und kompatible Version mit systemgesteuerten Leuchten (DALI, 1-10V, FLOS SMART CONTROL) verfügbar. Gemeinsame Ecken-, Verbinderelemente und Zubehör für beide Schienenversionen. Netzanschluss, Zwischenstecker und Abdeckungen sind separat zu bestellen. Mechanische 90°-Ecken verfügbar auf derselben Ebene (symmetrisches Element für die linke und rechte Ecke), symmetrische 90°-Innen- und Außenecken auf verschiedenen Ebenen. Zwischenstecker sind separat zu bestellen, um die elektrische Kontinuität in den Ecken zu gewährleisten. In den Ecken können keine Spots angebracht werden.

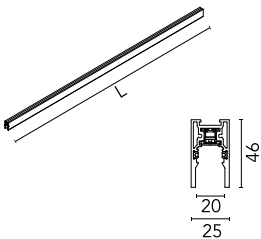

GWT 850°

# The Tracking Magnet Surface/Suspension Profile Casambi / Dali / 1-10V compatible




1 m suspension rod with ceiling rose with m6 thread  
60.3097.11



Ceiling fixing kit  
08.0615.00



Dimmable control box 1-10V 48V  
08.0613.14A

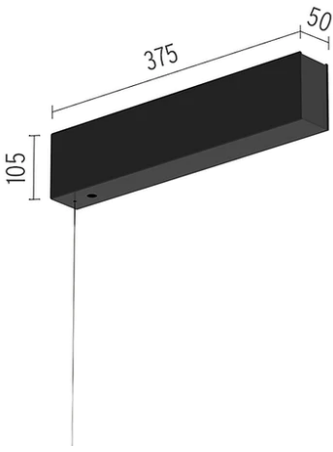

Surface power supply with 320W / 48Vdc driver included  
08.0600.14



4m suspension steel cable  
08.8634.00



LED Power Supply Source for remote installation. 48V. 100Vac (150W)-240Vac (200W)  
60.9607



1 m suspension rod with ceiling rose with m6 thread  
60.3097.14



Surface rose  
08.8883.14A



Suspension rod with 1m rose. M6 thread  
60.3014.11



---

Surface rose  
08.8883.40A



---

Recessed power supply rose  
08.8889.40



---

The Tracking Magnet Profile  
Intermediate Connector Straight  
08.0612.14



---

LED power supply source for remote  
installation, 48V/120W. 220/240 Vac  
60.9170




---

The Tracking Magnet Profile Feed  
Connector  
08.0611.14



---

Ceiling fixing kit  
08.0616.00

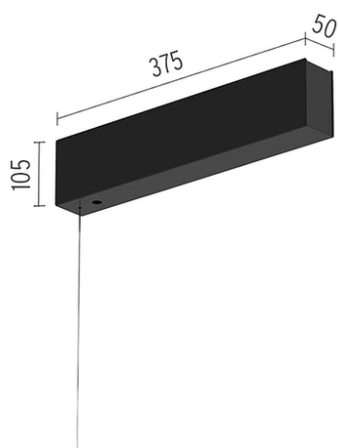

---

Surface power supply with 320W /  
48Vdc driver included  
08.0600.40



---

Recessed power supply rose  
08.8889.14




---

Suspension rod with 1m rose. M6  
thread  
60.3014.14



---

The Tracking Magnet  
Surface/Suspension Profile End Caps  
06.5017.05



---

4-pole, 0.75 mm<sup>2</sup> section, 4-meter long,  
transparent power cable  
06.0157.00



---

LED Power Supply Source for remote  
installation. 48V/320W. 100/240 Vac  
60.8919