



The Tracking Magnet Surface/Suspension Profile Casambi / Dali / 1-10V compatible

■ 06.5013.05 - Hochglänzendes Aluminium

Elektromechanische Profile für Aufputzmontage oder zum Aufhängen mit einer Länge von 1m bis 3m.

Hauptspezifikationen

| | |
|--------------------|---------------------------|
| Halterungen | Oberfläche und Aufhängung |
| Umgebung | Innenbeleuchtung |

Elektrisch



| | |
|---------------------|--|
| Spannung (V) | 48 |
| Dimmbar | Yes |
| Treiber | remote |
| Treiber-Typ | Ausgeschlossen Electronic dimmable CASAMBI, Elektronisch dimmbar 1-10 V, Elektronisch dimmbar DALI |
| Notfall | Ohne |

Physikalisch

| | |
|---------------------|--------------------------|
| Farbe | Hochglänzendes Aluminium |
| Gewicht (kg) | 3.04 |
| Länge (mm) | 2500 |

Note

Kompatible Version mit On Board Dimmer Leuchten und kompatible Version mit systemgesteuerten Leuchten (DALI, 1-10V, FLOS SMART CONTROL) verfügbar. Gemeinsame Ecken-, Verbinderelemente und Zubehör für beide Schienenversionen. Netzanschluss, Zwischenstecker und Abdeckungen sind separat zu bestellen. Mechanische 90°-Ecken verfügbar auf derselben Ebene (symmetrisches Element für die linke und rechte Ecke), symmetrische 90°-Innen- und Außenecken auf verschiedenen Ebenen. Zwischenstecker sind separat zu bestellen, um die elektrische Kontinuität in den Ecken zu gewährleisten. In den Ecken können keine Spots angebracht werden.



GWT
850°

The Tracking Magnet Surface/Suspension Profile Casambi / Dali / 1-10V compatible



1 m suspension rod with ceiling rose with m6 thread
60.3097.11



LED power supply source for remote installation, 48V/120W. 220/240 Vac
60.9170



Recessed power supply rose
08.8889.40



LED Power Supply Source for remote installation. 48V. 100Vac (150W)-240Vac (200W)
60.9607



Suspension rod with 1m rose. M6 thread
60.3014.11



Recessed power supply rose
08.8889.14



4m suspension steel cable
08.8634.00



The Tracking Magnet Profile Intermediate Connector Straight
08.0612.14



Dimmable control box 1-10V 48V
08.0613.14A



Surface rose
08.8883.40A



Ceiling fixing kit
08.0615.00



1 m suspension rod with ceiling rose
with m6 thread
60.3097.14



Suspension rod with 1m rose. M6
thread
60.3014.14




Surface rose
08.8883.14A



The Tracking Magnet Profile Feed
Connector
08.0611.14




LED Power Supply Source for remote
installation. 48V/320W. 100/240 Vac
60.8919




4-pole, 0.75 mm² section, 4-meter long,
transparent power cable
06.0157.00



Ceiling fixing kit
08.0616.00

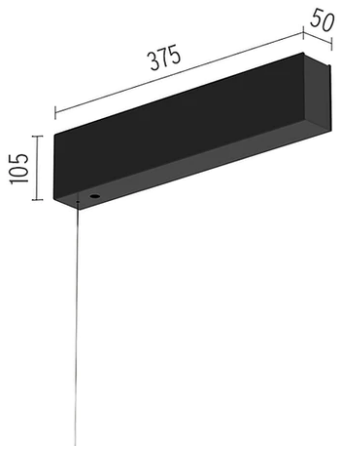

Surface power supply with 320W /
48Vdc driver included
08.0600.40

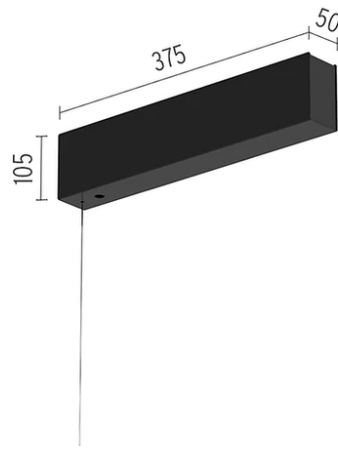

Surface power supply with 320W /
48Vdc driver included
08.0600.14



The Tracking Magnet
Surface/Suspension Profile End Caps
06.5017.05