



## The Tracking Magnet Surface/Suspension Profile Casambi / On Board Dimmer compatible

■ 06.5060.14 - Schwarz

Elektromechanische Profile für Aufputzmontage oder zum Aufhängen mit einer Länge von 1m bis 3m.

### Hauptspezifikationen

|                    |                           |
|--------------------|---------------------------|
| <b>Halterungen</b> | Oberfläche und Aufhängung |
| <b>Umgebung</b>    | Innenbeleuchtung          |

### Elektrisch


|                     |                                                  |
|---------------------|--------------------------------------------------|
| <b>Spannung (V)</b> | 48                                               |
| <b>Dimmbar</b>      | Yes                                              |
| <b>Treiber</b>      | Remote                                           |
| <b>Treiber-Typ</b>  | Integrierter Dimmer, Electronic dimmable CASAMBI |
| <b>Notfall</b>      | Ohne                                             |

### Physikalisch

|                     |         |
|---------------------|---------|
| <b>Farbe</b>        | Schwarz |
| <b>Gewicht (kg)</b> | 1.22    |
| <b>Länge (mm)</b>   | 1000    |

### Note

Kompatible Version mit On Board Dimmer Leuchten und kompatible Version mit systemgesteuerten Leuchten (DALI, 1-10V, FLOS SMART CONTROL) verfügbar. Gemeinsame Ecken-, Verbinderelemente und Zubehör für beide Schienenversionen. Netzanschluss, Zwischenstecker und Abdeckungen sind separat zu bestellen. Mechanische 90°-Ecken verfügbar auf derselben Ebene (symmetrisches Element für die linke und rechte Ecke), symmetrische 90°-Innen- und Außenecken auf verschiedenen Ebenen. Zwischenstecker sind separat zu bestellen, um die elektrische Kontinuität in den Ecken zu gewährleisten. In den Ecken können keine Spots angebracht werden.



GWT  
850°

## The Tracking Magnet Surface/Suspension Profile Casambi / On Board Dimmer compatible



Surface rose  
08.8883.14A



The Tracking Magnet Profile  
Intermediate Connector Straight  
08.0612.14



4m suspension steel cable  
08.8634.00



Suspension rod with 1m rose. M6  
thread  
60.3014.11



The Tracking Magnet  
Surface/Suspension Profile End Caps  
06.5017.14



Recessed power supply rose  
08.8889.14



LED power supply source for remote  
installation, 48V/120W. 220/240 Vac  
60.9170



LED Power Supply Source for remote  
installation. 48V/320W. 100/240 Vac  
60.8919




Ceiling fixing kit  
08.0616.00




LED Power Supply Source for remote installation. 48V. 100Vac (150W)-240Vac (200W)  
60.9607



4-pole, 0.75 mm2 section, 4-meter long, transparent power cable  
06.0157.00

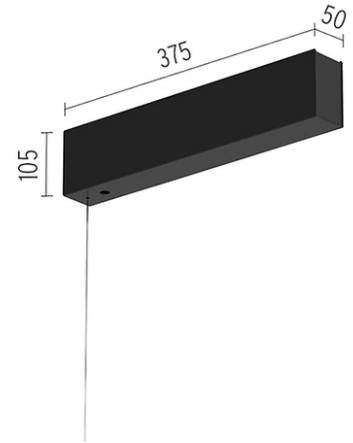

Surface power supply with 320W / 48Vdc driver included  
08.0600.40

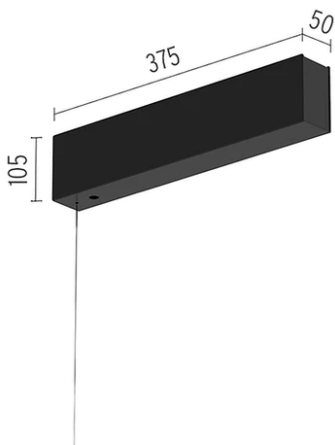

Surface power supply with 320W / 48Vdc driver included  
08.0600.14



1 m suspension rod with ceiling rose with m6 thread  
60.3097.11



Surface rose  
08.8883.40A



Recessed power supply rose  
08.8889.40



Ceiling fixing kit  
08.0615.00



The Tracking Magnet Profile Feed Connector  
08.0611.14



---

1 m suspension rod with ceiling rose  
with m6 thread  
60.3097.14



---

Suspension rod with 1m rose. M6  
thread  
60.3014.14