



## The Tracking Magnet Surface/Suspension Profile Casambi / On Board Dimmer compatible

06.5061.40 - Weiss

Elektromechanische Profile für Aufputzmontage oder zum Aufhängen mit einer Länge von 1m bis 3m.

### Hauptspezifikationen

|                    |                           |
|--------------------|---------------------------|
| <b>Halterungen</b> | Oberfläche und Aufhängung |
| <b>Umgebung</b>    | Innenbeleuchtung          |

### Elektrisch


|                     |                                                  |
|---------------------|--------------------------------------------------|
| <b>Spannung (V)</b> | 48                                               |
| <b>Dimmbar</b>      | Yes                                              |
| <b>Treiber</b>      | Remote                                           |
| <b>Treiber-Typ</b>  | Integrierter Dimmer, Electronic dimmable CASAMBI |
| <b>Notfall</b>      | Ohne                                             |

### Physikalisch

|                     |       |
|---------------------|-------|
| <b>Farbe</b>        | Weiss |
| <b>Gewicht (kg)</b> | 1.82  |
| <b>Länge (mm)</b>   | 1500  |


### Note

Kompatible Version mit On Board Dimmer Leuchten und kompatible Version mit systemgesteuerten Leuchten (DALI, 1-10V, FLOS SMART CONTROL) verfügbar. Gemeinsame Ecken-, Verbinderelemente und Zubehör für beide Schienenversionen. Netzanschluss, Zwischenstecker und Abdeckungen sind separat zu bestellen. Mechanische 90°-Ecken verfügbar auf derselben Ebene (symmetrisches Element für die linke und rechte Ecke), symmetrische 90°-Innen- und Außenecken auf verschiedenen Ebenen. Zwischenstecker sind separat zu bestellen, um die elektrische Kontinuität in den Ecken zu gewährleisten. In den Ecken können keine Spots angebracht werden.



GWT  
850°

## The Tracking Magnet Surface/Suspension Profile Casambi / On Board Dimmer compatible

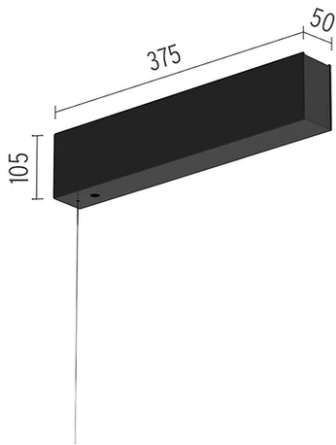

Surface power supply with 320W / 48Vdc driver included  
08.0600.14



4-pole, 0.75 mm² section, 4-meter long, transparent power cable  
06.0157.00



Ceiling fixing kit  
08.0615.00




Ceiling fixing kit  
08.0616.00



The Tracking Magnet Profile Intermediate Connector Straight  
08.0612.14




The Tracking Magnet Surface/Suspension Profile End Caps  
06.5017.40

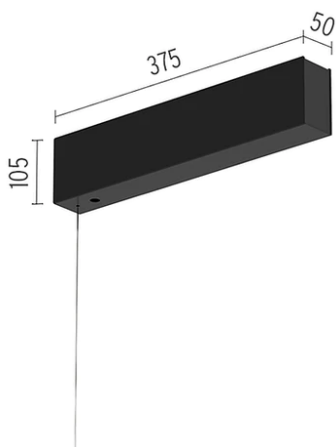

Surface power supply with 320W / 48Vdc driver included  
08.0600.40



LED Power Supply Source for remote installation. 48V/320W. 100/240 Vac  
60.8919



Surface rose  
08.8883.14A



Recessed power supply rose  
08.8889.14



1 m suspension rod with ceiling rose  
with m6 thread  
60.3097.14



1 m suspension rod with ceiling rose  
with m6 thread  
60.3097.11



4m suspension steel cable  
08.8634.00



Suspension rod with 1m rose. M6  
thread  
60.3014.11



Surface rose  
08.8883.40A



The Tracking Magnet Profile Feed  
Connector  
08.0611.14



Suspension rod with 1m rose. M6  
thread  
60.3014.14



LED Power Supply Source for remote  
installation. 48V. 100Vac (150W)-240Vac  
(200W)  
60.9607



---

Recessed power supply rose  
08.8889.40



---

LED power supply source for remote  
installation, 48V/120W. 220/240 Vac  
60.9170