Ground

Outdoor wet location











## Belvedere Clove 2 Dimmable 1-10V Forest Green

F001B31B012 - Forest Green

Family of outdoor products consisting of luminaires with a pole of two different heights and suitable for floor installations (ground or buried) and with integrated power supply box.

 $220\text{-}240V \, \text{power supply included. Ready for installation on solid surface.} \, \text{Box for ground installation to be ordered} \, \text{-} \, \text{-$ 

Included 2 way terminal block 4 poles IP68 H2O Stop.

Version 110V upon request.


## Main specifications

Lamp category	LED	Mountings
Power (W)	8.40	Environment
CCT (K)	3000K	
CRI	80	
Net lumen (lm)	657	

LED

#### Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Diffused light
Beam angle (°)	100
Beam angle C90-270 (°)	100



Luminous flux luminaire 657 lm

### Electrical

Frequency (Hz) Dimmable	50-60 Yes	Insulation class	II
Driver	Integrated		
Driver type	Dimmable 1-10V		
Emergency	Without		

# Physical

Color	Forest Green
Orientation	Fixed
Weight (kg)	2.10

#### Note

We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.

During the installation and the maintenance of the fixtures it is important to be careful and avoid damages on the paint coating.

Damages on the coating exposed to outdoor conditions or water, could cause corrosion.

Chemical substances affect the anticorrosion covering protection.


For LED fixtures, there is evidence that most of the damages are connected to electrical effects related to the insulations, which cause destructive electrical discharges

These effects are frequently caused by:

- $\bullet$  over voltage coming from the mains' network where fixture is connected.
- electrostatic discharge (ESD) coming from the environment.

The use of a protective device against the overvoltage on the electrical installation is warmly suggest this helps to reduce the intensity of some of these phenomenon and prevent irreversible damages. The selection of the type of device to be used must be adjust on the electrical plant.

# Belvedere Clove 2 Dimmable 1-10V Forest Green

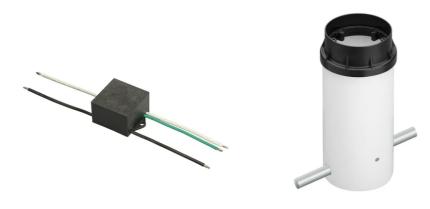

S.P.D. (SURGE PROTECTION DEVICE) F990E00A000

Box for ground installation F001Z020000