

## Belvedere Spot Pick Non Dimmable Anthracite

■ F001F41A033 - Anthracite


Family of adjustable outdoor LED lighting luminaires (double rotation, vertical and horizontal axle) suitable for floor installations (ground or buried) and with integrated power supply box.  
220-240V power supply included. Included 2 way terminal block 4 poles IP68 H2O Stop.  
24V Dimmable version available on request.  
Version 110V upon request.

### Main specifications

Lamp category	LED
Power (W)	6
CCT (K)	4000K
Mountings	Ground spike
Environment	Outdoor wet location

### Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Spot
Beam angle (°)	10
Beam angle C90-270 (°)	10



Beam Angle:	10°	
	h(m)	E(lx) D(m)
	1	6749 0.17
	2	1687 0.34
	3	750 0.51
	4	422 0.68
	5	270 0.84

Luminous flux luminaire  
473 lm

### Electrical

Frequency (Hz)	50-60	Emergency	Without
Voltage (V)	220-240	Insulation class	II
Dimmable	No		
Driver	Integrated		
Driver type	Non Dimmable		

### Physical

Color	Anthracite
Orientation	Adjustable
Weight (kg)	1.05

### Note


We recommend using a connection system with a degree of protection greater than or equal to the degree of protection of the luminaire.  
During the installation and the maintenance of the fixtures it is important to be careful and avoid damages on the paint coating.  
Damages on the coating exposed to outdoor conditions or water, could cause corrosion.  
Chemical substances affect the anticorrosion covering protection.  
For LED fixtures, there is evidence that most of the damages are connected to electrical effects related to the insulations, which cause destructive electrical discharges  
These effects are frequently caused by:

- over voltage coming from the mains' network where fixture is connected.
- electrostatic discharge (ESD) coming from the environment.

The use of a protective device against the overvoltage on the electrical installation is warmly suggest this helps to reduce the intensity of some of these phenomenon and prevent irreversible damages. The selection of the type of device to be used must be adjust on the electrical plant.



## Belvedere Spot Pick Non Dimmable Anthracite

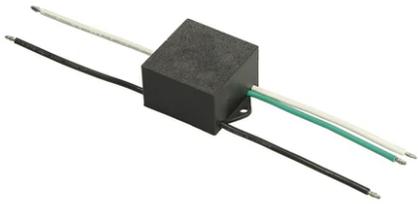

---

S.P.D. (SURGE PROTECTION DEVICE)  
F990E00A000



---

Spot visor with honeycomb  
F001Z030000



---

Spot visor  
F001Z010000



---

Spot visor with flood lens  
F001Z040000