



Captain Flint Outdoor W1 Dimmable 1-10V

■ F011W40B018 - Deep Brown


Luminaire for wall-mounting with diffuse light emission and fixed head.

Rose, frame and cone in 316L polished or painted stainless steel or polished brass finishes. Structural parts have been treated with a chemical conversion process for effective resistance against atmospheric conditions. Diffuser in photo-recorded and injection molded UV-resistant opalescent polycarbonate. LED light source included.

Integrated 220-240V 1-10V dimmable electrical power.

Connection is quickly ensured in the rose with the plug & play electrical connection and the IP68 connector included. Clamp bracket included.

110V version upon request

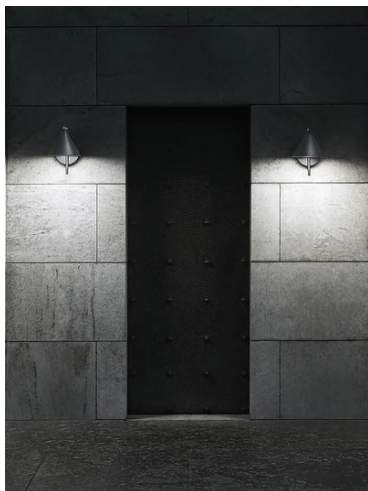


Main specifications

| | | | |
|-----------------|-------|----------------|--------------------------|
| Number of heads | 1 | Net lumen (lm) | 703 |
| Lamp category | LED | Mountings | Ceiling and wall surface |
| Power (W) | 11 | | |
| CCT (K) | 4000K | | |
| CRI | 80 | | |

Optical


| | |
|------------------------|----------------|
| Lighting type | Direct |
| LED type | LED array |
| Light distribution | Symmetric |
| Optical type | Diffused light |
| Beam angle (°) | 112 |
| Beam angle C90-270 (°) | 112 |

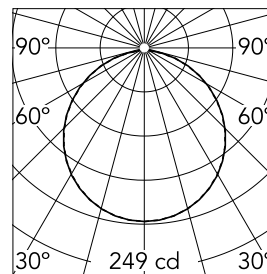

Beam Angle: 112°

| h(m) | E(lx) | D(m) |
|------|-------|-------|
| 1 | 249 | 2.95 |
| 2 | 62 | 5.91 |
| 3 | 28 | 8.86 |
| 4 | 16 | 11.81 |
| 5 | 10 | 14.76 |

Luminous flux luminaire
703 lm



Electrical

| | | | |
|----------------|----------------|------------------|---------|
| Frequency (Hz) | 50-60 | Emergency | Without |
| Voltage (V) | 220-240 | Insulation class | I |
| Dimmable | Yes | | |
| Driver | Integrated | | |
| Driver type | Dimmable 1-10V | | |

Physical

| | |
|--------------------|------------|
| Color | Deep Brown |
| Orientation | Fixed |
| Weight (kg) | 2.1 |
| Spot diameter (mm) | 208 |
| Length (mm) | 336 |

Note

110V version upon request.

