


Clessidra 40°+40°

■ F1584018 - Deep Brown

Diffused direct/indirect-light wall lighting device. Body obtained by means of aluminium pressofusion and diffusers in PMMA. Aluminium wall attachment with cover in PA66. Available in white-painted or chrome-plated for indoor version and dark brown-painted or dark gray-painted for outdoor version. High-efficiency lenses specially designed for the application, non-replaceable. Wide range (100-240Volt) power pack integrated in the body. Level IP55




Main specifications

Number of heads	2	Environment	Indoor Outdoor wet location
Power (W)	10		
CCT (K)	3000K		
Net lumen (lm)	601		
Mountings	Wall		

Optical

Lighting type	Indirect, Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Diffused light

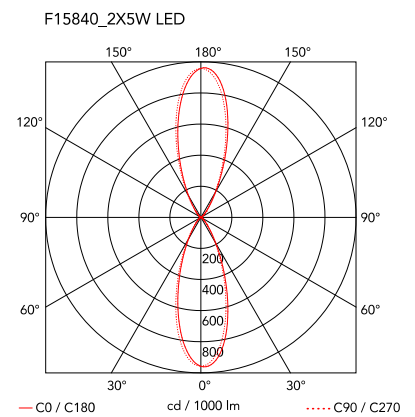

Electrical

Frequency (Hz)	50/60	Emergency	Without
Voltage (V)	100-240	Insulation class	I
Lamp holder	COB LED		
Driver	Integrated		
Driver type	Non Dimmable		

Physical

Color	Deep Brown
Weight (kg)	1.1

