FLOS



Klein Pro H 900 mm Dimmable 1-10V Deep Brown

F002B20B018.A - Deep Brown

The body of Klein Pro bollard is made of extruded aluminium, base and diffuser in die-cast aluminium EN AB-47100 with a low copper content.

High-resistance coating: the external coating is applied with a double layer with epoxy powders according to the QUALICOAT standard. The first layer of epoxy powder gives chemical and mechanical resistance, the second finishing layer of polyester powder ensures resistance.

Also available in anodized finishes.

Main specifications

Klein Pro is compatible with existing "Klein" fixing plate.

220-240V power supply integrated. Solid surface or ground installation accessories to be ordered separately. Each luminaire is equipped with 1000 mm lenght outgoing cable and a wiring kit.





Mountings Lamp category I FD Ground Power (W) 11 Environment Outdoor wet location CCT (K) 2700K CRI 80 Net lumen (lm) 292 Optical Lighting type Direct LED type Power LED 76 90 Light distribution Asymmetric Optical type Asymmetric Beam angle (°) 45 λO ٨ſ Beam angle C90-270 (°) 20 30° 343 cd 30 Luminous flux luminaire 294 lm Electrical Frequency (Hz) 50-60 Emergency Without Voltage (V) 220-240 Insulation class Ш Dimmable Yes Integrated Driver Dimmable 1-10V Driver type Physical Color Deep Brown Orientation Fixed Weight (kg) 1.95

Note

During the installation and the maintenance of the fixtures it is important to be careful and avoid damages on the paint coating.

Damages on the coating exposed to outdoor conditions or water, could cause corrosion.

Chemical substances affect the anticorrosion covering protection.


For LED fixtures, there is evidence that most of the damages are connected to electrical effects related to the insulations, which cause destructive electrical discharges

These effects are frequently caused by:

• over voltage coming from the mains' network where fixture is connected.

• electrostatic discharge (ESD) coming from the environment.

The use of a protective device against the overvoltage on the electrical installation is warmly suggest this helps to reduce the intensity of some of these phenomenon and prevent irreversible damages. The selection of the type of device to be used must be adjust on the electrical plant.

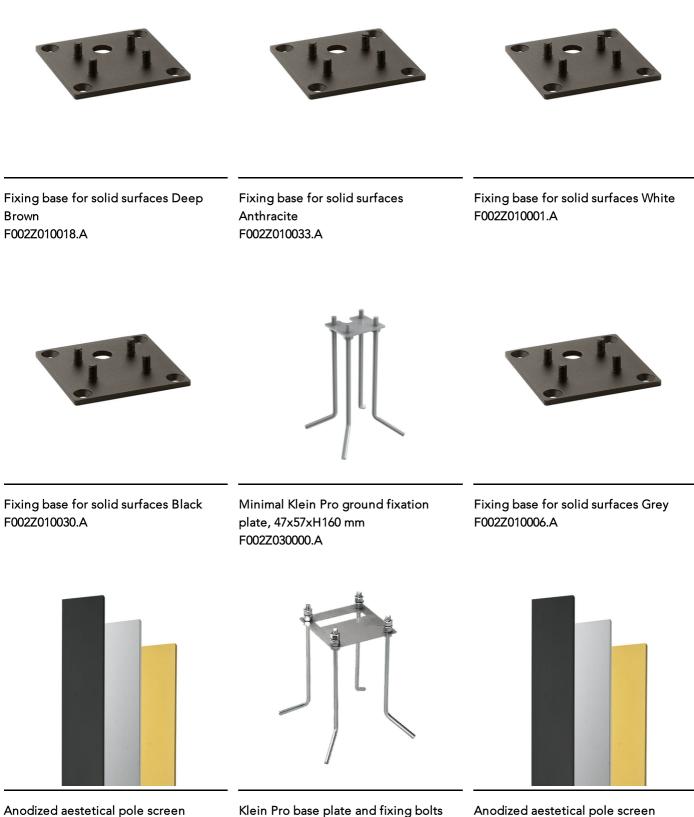

F002Z050073 F002Z020000

Anodized Gold

Anodized aestetical pole screen Anodized Natural F002Z050070

85x85xH160 mm



Anodized aestetical pole screen Anodized Black F002Z050071