

Martina Aqua Rgb

105174144.0 - Inox

Adjustable spotlight.

Configuration: AISI 316L stainless steel structure and adjustable bracket. Glass diffuser: transparent or sandblasted with silkscreen border, fixed through a robotic gluing system.

Protection rating: IP68

In compliance with EN60598-1 standards

Class of insulation: III

Installation: the luminaire is equipped with 5000mm cable. Martina Aqua 24V and Maxi Martina Aqua 24V are equipped with a dc/dc highly efficient resin-coated converter that removes electromagnetic interference and protects against polarity reversal and sudden voltage peak. Parallel wiring required. Mini Martina Aqua, Martina Aqua RGB and Maxi Martina Aqua RGB requires connection in series. SELV equivalent remote power supply required.

We recommend the use of a connection system with a protection degree greater than or equal to the protection degree of the luminaire.

During the installation and the maintenance of the fixtures it is important to be careful and avoid damages on the paint coating.

Damages on the coating exposed to outdoor conditions or water, could cause corrosion.

Chemical substances affect the anticorrosion covering protection.

Main specifications

Power (W)	3.4
System power (W)	3.4
Mountings	Ceiling, Ground, Wall surface
Environment	Outdoor

Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Medium

Electrical

Frequency (Hz)	50-60	Insulation class	III
Voltage (V)	350MA		
Dimmable	Yes		
Driver type	Dmx		
Emergency	Without		

Physical

Color	Inox
--------------	------

Martina Aqua Rgb



Ground Spike Martina/Mini
Martina/Perseo 9/Iota
136




Power Supply Dmx Rgb 36W
220÷230V/3Chx350mA Ip67
141



Dmx Controller Dimmer Switch For
Recessed Box
142



Dmx Controller Stand-Alone/Pc
Interface
143

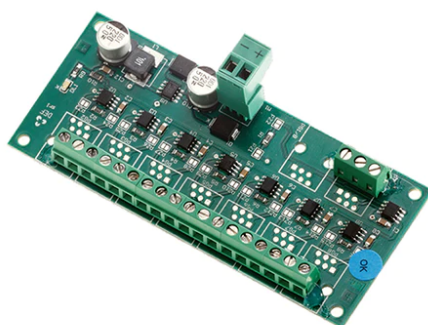

DMX splitter 512 – electronic device to
regenerate the monodirectional DMX
signal 1 Input and 7 output, 12-
24Vdc_IP20. Power supply not included
187



Dmx Cable Shielded Twisted Pair
186