

Maxi Franco Street Optic Power Led Dimmable 1-10V

9724814-310.3 - Anthracite

Luminaire for installation on wall or on pole.

Configuration: die-cast aluminium structure, EN AB-47100 alloy (low copper content) and pure aluminium reflector. Glass diffuser: extra-clear. Graduated stainless steel fixing plate for a precise adjustment.

Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sand-blasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting. Protection rating: IP65

In compliance with EN60598-1 standards

Class of insulation: I

Installation: wiring through a M20x1,5 metal cable gland (7 mm < \emptyset <13mm cables). Outdoor use requires suitable flexible cables assuring the watertightness of the cable gland.

During the installation and the maintenance of the fixtures it is important to be careful and avoid damages on the paint coating.

Damages on the coating exposed to outdoor conditions or water, could cause corrosion.


Chemical substances affect the anticorrosion covering protection.

Main specifications

Power (W)	42	Mountings	Pole, Wall surface, Floor
System power (W)	47	Environment	Outdoor
CCT (K)	3000K		
CRI	80		
Net lumen (lm)	1841		

Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Asymmetric
Optical type	Wide flood



Electrical

Frequency (Hz)	50-60	
Voltage (V)	110-240	
Dimmable	Yes	
Driver type	Electronic	
	dimmable 1-10V	
Emergency	Without	

Insulation class

Physical

Color Anthracite

Maxi Franco Street Optic Power Led Dimmable 1-10V







Pole Bracket Franco/Perseo 30 Ø 102 mm 180 mm Double 78.3

Pole Bracket Franco/Perseo 30 Ø 102 mm 180 mm Double 90.3 Pole Bracket Franco/Perseo 30 Ø 102 mm 500 mm Single 79.3







Pole Bracket Franco/Perseo 30 Ø 102 mm 500 mm Double 89.3

Pole Bracket Franco/Perseo 30 Ø 60 mm 180 mm Double 93.3

Pole Bracket Franco/Perseo 30 Ø 60 mm 180 mm Double 95.3







Pole Bracket Franco/Perseo 30 Ø 102 mm 180 mm Double 94.3 Pole Bracket Franco/Perseo 30 Ø 60 mm 500 mm Double 96.3

Pole Bracket Franco/Perseo 30 Ø 76 mm 180 mm Single 112.3







Pole Bracket Franco/Perseo 30 Ø 76 mm 180 mm Double 114.3

Pole Bracket Franco/Perseo 30 Ø 76 mm 500 mm Single 113.3

Pole Bracket Franco/Perseo 30 Ø 76 mm 500 mm Double 115.3







SPD (Surge Protection Device) 237

Pole Franco/Perseo/Dooku h 3500(with Base) mm Ø76 mm 248.3

Pole Franco/Perseo/Dooku h 4500(with Base) mm Ø76 mm 249.3








Pole Franco/Perseo/Dooku h 3500(+500 Pole Franco/Perseo/Dooku h 4500(+500 Pole Ø 102 mm h 4000 mm With Base mm Inground) mm Ø76 mm 250.3

mm Inground) mm Ø76 mm 251.3

4140.3

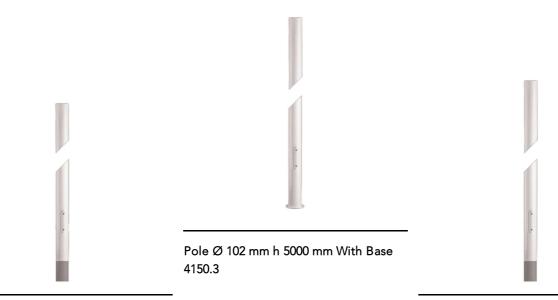

Pole Ø 102 mm h 4000(+500 mm Inground) mm 4145.3



Base Plate and Fixing Bolts for Pole \varnothing 102 mm h 4000/5000 mm with Base 116

Pole Ø 102 mm h 5000(+500 mm Inground) mm 4155.3