

## Maxi Martina Aqua Rgb

105256145.0 - Inox

Adjustable spotlight.

Configuration: AISI 316L stainless steel structure and adjustable bracket. Glass diffuser: transparent or sandblasted with silkscreen border, fixed through a robotic gluing system.

Protection rating: IP68

In compliance with EN60598-1 standards

Class of insulation: III

Installation: the luminaire is equipped with 5000mm cable. Martina Aqua 24V and Maxi Martina Aqua 24V are equipped with a dc/dc highly efficient resin-coated converter that removes electromagnetic interference and protects against polarity reversal and sudden voltage peak. Parallel wiring required. Mini Martina Aqua, Martina Aqua RGB and Maxi Martina Aqua RGB requires connection in series. SELV equivalent remote power supply required.

We recommend the use of a connection system with a protection degree greater than or equal to the protection degree of the luminaire.

During the installation and the maintenance of the fixtures it is important to be careful and avoid damages on the paint coating.

Damages on the coating exposed to outdoor conditions or water, could cause corrosion.

Chemical substances affect the anticorrosion covering protection.

### Main specifications

<b>Power (W)</b>	13.6
<b>System power (W)</b>	13.6
<b>Mountings</b>	Ceiling, Ground, Wall surface
<b>Environment</b>	Outdoor

### Optical

<b>Lighting type</b>	Direct
<b>LED type</b>	Power LED
<b>Light distribution</b>	Symmetric
<b>Optical type</b>	Medium

### Electrical

<b>Frequency (Hz)</b>	50-60	<b>Insulation class</b>	III
<b>Voltage (V)</b>	350MA		
<b>Dimmable</b>	Yes		
<b>Driver type</b>	Dmx		
<b>Emergency</b>	Without		

### Physical

<b>Color</b>	Inox
--------------	------

## Maxi Martina Aqua Rgb



Ground Spike Martina/Mini  
Martina/Perseo 9/Iota  
136




Power Supply Dmx Rgb 36W  
220÷230V/3Chx350mA Ip67  
141



Dmx Controller Dimmer Switch For  
Recessed Box  
142



Dmx Controller Stand-Alone/Pc  
Interface  
143

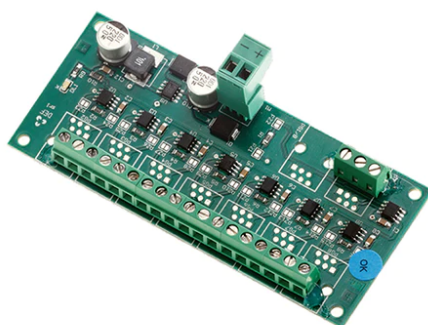

DMX splitter 512 – electronic device to  
regenerate the monodirectional DMX  
signal 1 Input and 7 output, 12-  
24Vdc\_IP20. Power supply not included  
187



Dmx Cable Shielded Twisted Pair  
186