


Mini Martina Aqua 350mA

105171143.0 - Inox



Adjustable spotlight.

Configuration: AISI 316L stainless steel structure and adjustable bracket. Glass diffuser: transparent or sandblasted with silkscreen border, fixed through a robotic gluing system.

Protection rating: IP68

In compliance with EN60598-1 standards

Class of insulation: III

Installation: the luminaire is equipped with 5000mm cable. Martina Aqua 24V and Maxi Martina Aqua 24V are equipped with a dc/dc highly efficient resin-coated converter that removes electromagnetic interference and protects against polarity reversal and sudden voltage peak. Parallel wiring required. Mini Martina Aqua, Martina Aqua RGB and Maxi Martina Aqua RGB requires connection in series. SELV equivalent remote power supply required.

We recommend the use of a connection system with a protection degree greater than or equal to the protection degree of the luminaire.

During the installation and the maintenance of the fixtures it is important to be careful and avoid damages on the paint coating.

Damages on the coating exposed to outdoor conditions or water, could cause corrosion.


Chemical substances affect the anticorrosion covering protection.

Main specifications

Power (W)	1.1	Environment	Outdoor
System power (W)	1.1		
CCT (K)	4000K		
Net lumen (lm)	110		
Mountings	Ceiling, Ground, Wall surface		

Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Medium

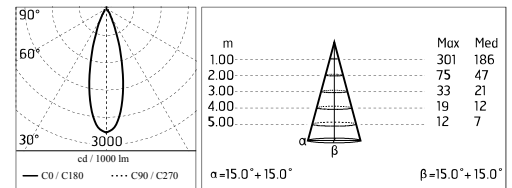


Electrical

Frequency (Hz)	50-60
Dimmable	No
Driver type	Not dimmable
Emergency	Without
Insulation class	III

Physical

Color	Inox
--------------	------

Mini Martina Aqua 350mA

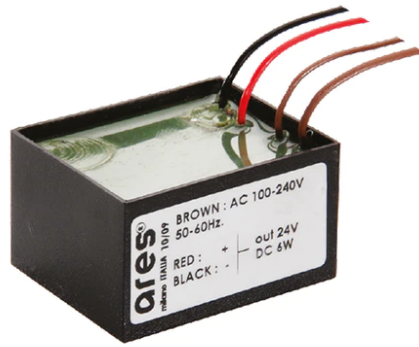

Ground Spike Martina/Mini
Martina/Perseo 9/lota
136

Power Supply 100÷240Vac/ 8W at
24Vdc/ 6W at 350mA Ip65
106

Power Supply 16X1W 110÷240V/350mA
Ip67
184



Power Supply Dali 20W
110÷240V/350mA Ip67
238