



## Perseo 30 Rgb

525124.1 - White

Adjustable projector for installation on wall or on pole.

Configuration: die-cast aluminium structure. EN AB-47100 alloy (low copper content). Glass diffuser: extra-clear, fixed to the frame through a robotic gluing system. Graduated stainless steel fixing plate for a precise adjustment.

Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sand-blasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting.

Protection rating: IP65

In compliance with EN60598-1 standards

Class of insulation: I

Installation: wiring through an M20x1.5 metal cable gland (7mm<ø<13mm cables). Outdoor use requires suitable flexible cables assuring the watertightness of the cable gland.

During the installation and the maintenance of the fixtures it is important to be careful and avoid damages on the paint coating.

Damages on the coating exposed to outdoor conditions or water, could cause corrosion.

Chemical substances affect the anticorrosion covering protection.

### Main specifications

Power (W)	34
System power (W)	40
Mountings	Pole, Wall surface, Floor
Environment	Outdoor

### Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Asymmetric
Optical type	Medium

### Electrical

Frequency (Hz)	50-60	Insulation class	I
Voltage (V)	220-240		
Dimmable	Yes		
Driver type	Dmx		
Emergency	Without		

### Physical

Color	White
-------	-------

Perseo 30 Rgb



Pole Bracket Franco/Perseo 30 Ø 102  
mm 180 mm Double  
78.1

Pole Bracket Franco/Perseo 30 Ø 102  
mm 180 mm Double  
90.1

Pole Bracket Franco/Perseo 30 Ø 102  
mm 500 mm Single  
79.1



Pole Bracket Franco/Perseo 30 Ø 102  
mm 500 mm Double  
89.1

Pole Bracket Franco/Perseo 30 Ø 60  
mm 180 mm Double  
93.1

Pole Bracket Franco/Perseo 30 Ø 60  
mm 180 mm Double  
95.1



Pole Bracket Franco/Perseo 30 Ø 102  
mm 180 mm Double  
94.1

Pole Bracket Franco/Perseo 30 Ø 60  
mm 500 mm Double  
96.1

Pole Bracket Franco/Perseo 30 Ø 76  
mm 180 mm Single  
112.1



Pole Bracket Franco/Perseo 30 Ø 76  
mm 180 mm Double  
114.1



Pole Bracket Franco/Perseo 30 Ø 76  
mm 500 mm Single  
113.1



Pole Bracket Franco/Perseo 30 Ø 76  
mm 500 mm Double  
115.1




Wall Washer Visor Perseo 30  
167.4



Antivandal Louvre Perseo 30  
168.4



Wall Bracket Perseo 30 1000 mm  
181.1

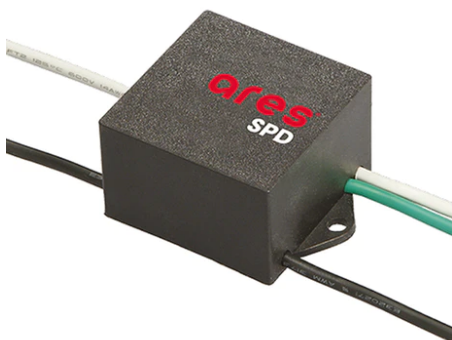

SPD (Surge Protection Device)  
237



Pole Franco/Perseo/Dooku h 3500(with  
Base) mm Ø76 mm  
248.3



Pole Franco/Perseo/Dooku h 3500(with  
Base) mm Ø76 mm  
248.6



---

Pole Franco/Perseo/Dooku h 4500(with  
Base) mm Ø76 mm  
249.3



---

Pole Franco/Perseo/Dooku h 4500(with  
Base) mm Ø76 mm  
249.6



---

Pole Franco/Perseo/Dooku h 3500(+500  
mm Inground) mm Ø76 mm  
250.3



---

Pole Franco/Perseo/Dooku h 3500(+500  
mm Inground) mm Ø76 mm  
250.6



---

Pole Franco/Perseo/Dooku h 4500(+500  
mm Inground) mm Ø76 mm  
251.3



---

Pole Franco/Perseo/Dooku h 4500(+500  
mm Inground) mm Ø76 mm  
251.6



---

Pole Ø 102 mm h 4000 mm With Base  
4140.3



---

Pole Ø 102 mm h 4000 mm With Base  
4140.6



---

Pole Ø 102 mm h 4000(+500 mm In-  
ground) mm  
4145.3



Pole Ø 102 mm h 4000(+500 mm In-ground) mm  
4145.6



Pole Ø 102 mm h 5000 mm With Base



Pole Ø 102 mm h 5000 mm With Base



Pole Ø 102 mm h 5000(+500 mm In-ground) mm  
4155.3



Pole Ø 102 mm h 5000(+500 mm In-ground) mm  
4155.6




Dmx Controller Dimmer Switch For Recessed Box  
142




Dmx Controller Stand-Alone/Pc Interface  
143



Dmx Cable Shielded Twisted Pair  
186

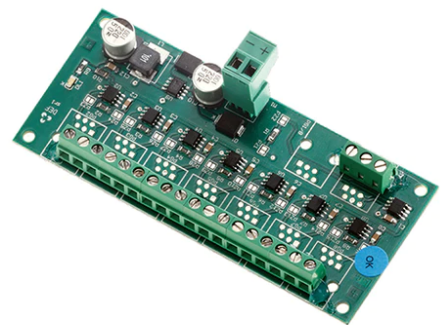

DMX splitter 512 – electronic device to regenerate the monodirectional DMX signal 1 Input and 7 output, 12-24Vdc\_IP20. Power supply not included  
187

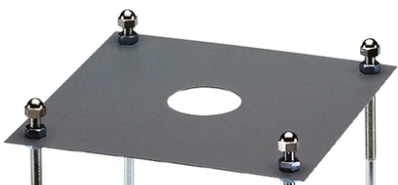



---

Base Plate and Fixing Bolts for Pole Ø  
102 mm h 4000/5000 mm with Base  
116