

## Perseo 30 Street Optic

■ 525166.A.4 - Black



Adjustable projector for installation on wall or on pole.

Configuration: die-cast aluminium structure. EN AB-47100 alloy (low copper content). Glass diffuser: extra-clear, fixed to the frame through a robotic gluing system. Graduated stainless steel fixing plate for a precise adjustment.

Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sand-blasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting.

Protection rating: IP65

In compliance with EN60598-1 standards

Class of insulation: I

Installation: wiring through an M20x1.5 metal cable gland (7mm <math>\phi</math> <math>< 13</math>mm cables). Outdoor use requires suitable flexible cables assuring the watertightness of the cable gland.

During the installation and the maintenance of the fixtures it is important to be careful and avoid damages on the paint coating.

Damages on the coating exposed to outdoor conditions or water, could cause corrosion.



Chemical substances affect the anticorrosion covering protection.

### Main specifications

<b>Power (W)</b>	48	<b>Mountings</b>	Pole, Wall surface, Floor
<b>System power (W)</b>	53	<b>Environment</b>	Outdoor wet location
<b>CCT (K)</b>	2700K		
<b>CRI</b>	80		
<b>Net lumen (lm)</b>	2609		

### Optical

<b>Lighting type</b>	Direct
<b>LED type</b>	Power LED
<b>Light distribution</b>	Asymmetric
<b>Optical type</b>	Wide flood

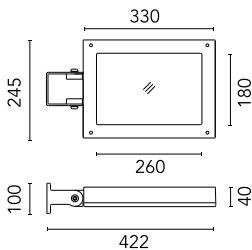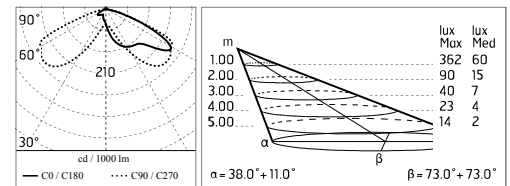

### Electrical

<b>Frequency (Hz)</b>	50-60	<b>Insulation class</b>	I
<b>Voltage (V)</b>	220-240		
<b>Dimmable</b>	No		
<b>Driver type</b>	Non Dimmable		
<b>Emergency</b>	Without		

### Physical

<b>Color</b>	Black
--------------	-------

## Perseo 30 Street Optic



Pole Bracket Franco/Perseo 30 Ø 102 mm 180 mm Double  
78.4



Pole Bracket Franco/Perseo 30 Ø 76 mm 180 mm Double  
114.4



Pole Bracket Franco/Perseo 30 Ø 76 mm 180 mm Single  
112.4



Pole Bracket Franco/Perseo 30 Ø 102 mm 500 mm Single  
79.4



Pole Bracket Franco/Perseo 30 Ø 76 mm 500 mm Double  
115.4




Wall Bracket/Pole 300 mm Perseo 4  
181.4



Pole Bracket Franco/Perseo 30 Ø 60 mm 180 mm Double  
93.4



Wall Washer Visor Perseo 30  
167.4

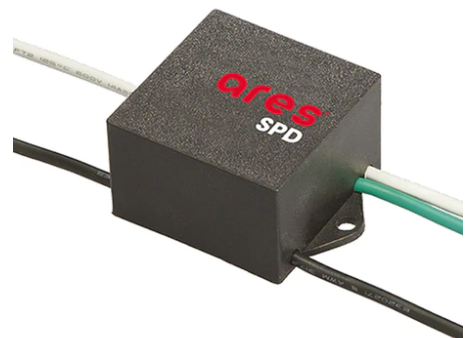

SPD (Surge Protection Device)  
237



Pole Bracket Franco/Perseo 30 Ø 76 mm 500 mm Single  
113.4



Antivandal Louvre Perseo 30  
168.4



Pole Franco/Perseo/Dooku h 4500(+500 mm Inground) mm Ø76 mm  
251.3



Pole Franco/Perseo/Dooku h 3500(+500 mm Inground) mm Ø76 mm  
250.3



Pole Ø 102 mm h 5000 mm With Base  
4150.6



Base Plate and Fixing Bolts for Pole Ø 102 mm h 4000/5000 mm with Base  
116



Pole Ø 102 mm h 5000(+500 mm Inground) mm  
4155.6



Pole Ø 102 mm h 4000 mm With Base  
4140.6



Pole Franco/Perseo/Dooku h 4500(+500 mm Inground) mm Ø76 mm  
251.6



Pole Bracket Franco/Perseo 30 Ø 102 mm 180 mm Double  
94.4



Pole Bracket Franco/Perseo 30 Ø 60 mm 180 mm Double  
95.4



Pole Franco/Perseo/Dooku h 4500(with Base) mm Ø76 mm  
249.3



Pole Ø 102 mm h 5000 mm With Base  
4150.3



Pole Bracket Franco/Perseo 30 Ø 60 mm 500 mm Double  
96.4



Pole Franco/Perseo/Dooku h 4500(with Base) mm Ø76 mm  
249.6



Pole Ø 102 mm h 4000 mm With Base  
4140.3



Pole Ø 102 mm h 4000(+500 mm In-ground) mm  
4145.6



Pole Franco/Perseo/Dooku h 3500(with Base) mm Ø76 mm  
248.6



---

Pole Bracket Franco/Perseo 30 Ø 102 mm 500 mm Double  
89.4

---

Pole Bracket Franco/Perseo 30 Ø 102 mm 180 mm Double  
90.4

---

Pole Ø 102 mm h 5000(+500 mm In-ground) mm  
4155.3



---

Pole Franco/Perseo/Dooku h 3500(with Base) mm Ø76 mm  
248.3

---

Pole Franco/Perseo/Dooku h 3500(+500 mm In-ground) mm Ø76 mm  
250.6

---

Pole Ø 102 mm h 4000(+500 mm In-ground) mm  
4145.3