



Perseo 30 Symmetric Optic Dimmable Dali

■ 525123-300.A.12 - Forest Green

Adjustable projector for installation on wall or on pole.

Configuration: die-cast aluminium structure. EN AB-47100 alloy (low copper content). Glass diffuser: extra-clear, fixed to the frame through a robotic gluing system. Graduated stainless steel fixing plate for a precise adjustment.

Double layer coating for high resistance to corrosion: the aluminium components are painted with a double coat using powders which are compliant with QUALICOAT standards: a first layer of epoxy powder (with excellent chemical and mechanical resistance) and a second finishing layer of polyester powder (resistant to UV rays and atmospheric agents). The entire painting process of the aluminium fitting starts from components which have been sand-blasted in advance to make the surface more porous and increase the adherence of the paint. Ares effects alkaline and acid washing to clean the surfaces completely, then rinses with demineralised water to remove any residue particles, subsequently a chemical conversion treatment is done to protect against rusting.

Protection rating: IP65

In compliance with EN60598-1 standards

Class of insulation: I

Installation: wiring through an M20x1.5 metal cable gland (7mm < ϕ < 13mm cables). Outdoor use requires suitable flexible cables assuring the watertightness of the cable gland.

During the installation and the maintenance of the fixtures it is important to be careful and avoid damages on the paint coating.

Damages on the coating exposed to outdoor conditions or water, could cause corrosion.



Chemical substances affect the anticorrosion covering protection.

Main specifications

| | | | |
|-------------------------|-------|--------------------|---------------------------|
| Power (W) | 48 | Mountings | Pole, Wall surface, Floor |
| System power (W) | 53 | Environment | Outdoor wet location |
| CCT (K) | 3000K | | |
| CRI | 80 | | |
| Net lumen (lm) | 4405 | | |

Optical

| | |
|---------------------------|-----------|
| Lighting type | Direct |
| LED type | Power LED |
| Light distribution | Symmetric |
| Optical type | Medium |



Electrical

| | | | |
|-----------------------|---------------|-------------------------|---|
| Frequency (Hz) | 50-60 | Insulation class | I |
| Voltage (V) | 220-240 | | |
| Dimmable | Yes | | |
| Driver type | Dimmable DALI | | |
| | 1 | | |
| Emergency | Without | | |

Physical

| | |
|--------------|--------------|
| Color | Forest Green |
|--------------|--------------|

Perseo 30 Symmetric Optic Dimmable Dali




Pole Bracket Franco/Perseo 30 Ø 102 mm 180 mm Double
90.12



Pole Bracket Franco/Perseo 30 Ø 60 mm 180 mm Double
95.12



Pole Franco/Perseo/Dooku h 4500(+500 mm Inground) mm Ø76 mm
251.3

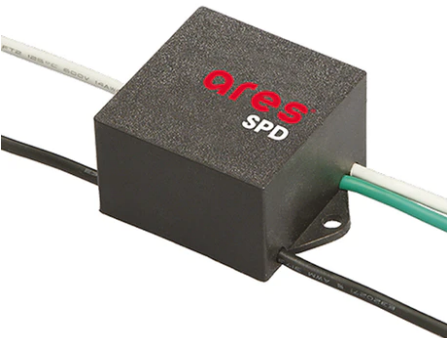

SPD (Surge Protection Device)
237



Pole Bracket Franco/Perseo 30 Ø 102 mm 500 mm Single
79.12



Pole Bracket Franco/Perseo 30 Ø 102 mm 500 mm Double
89.12



Pole Bracket Franco/Perseo 30 Ø 102 mm 180 mm Double
78.12



Pole Ø 102 mm h 5000(+500 mm In-ground) mm
4155.6



Pole Ø 102 mm h 4000(+500 mm In-ground) mm
4145.3



Antivandal Louvre Perseo 30
168.4



Pole Bracket Franco/Perseo 30 Ø 60
mm 500 mm Double
96.12



Pole Ø 102 mm h 5000 mm With Base
4150.3



Pole Ø 102 mm h 4000 mm With Base
4140.6



Pole Franco/Perseo/Dooku h 4500(with
Base) mm Ø76 mm
249.6



Pole Ø 102 mm h 4000 mm With Base
4140.3



Pole Ø 102 mm h 5000(+500 mm In-
ground) mm
4155.3



Pole Ø 102 mm h 5000 mm With Base
4150.6



Pole Bracket Franco/Perseo 30 Ø 60
mm 180 mm Double
93.12



Pole Bracket Franco/Perseo 30 Ø 76
mm 180 mm Single
112.12



Pole Franco/Perseo/Dooku h 3500(+500
mm Inground) mm Ø76 mm
250.3



Wall Washer Visor Perseo 30
167.4



Pole Franco/Perseo/Dooku h 3500(with
Base) mm Ø76 mm
248.3



Wall Bracket Perseo 30 1000 mm
181.12



Pole Bracket Franco/Perseo 30 Ø 76
mm 180 mm Double
114.12



Pole Bracket Franco/Perseo 30 Ø 102
mm 180 mm Double
94.12



Pole Franco/Perseo/Dooku h 3500(+500
mm Inground) mm Ø76 mm
250.6



Pole Ø 102 mm h 4000(+500 mm In-
ground) mm
4145.6



Base Plate and Fixing Bolts for Pole Ø 102 mm h 4000/5000 mm with Base
116



Pole Franco/Perseo/Dooku h 3500 (with Base) mm Ø76 mm
248.6



Pole Franco/Perseo/Dooku h 4500 (with Base) mm Ø76 mm
249.3



Pole Bracket Franco/Perseo 30 Ø 76 mm 500 mm Single
113.12



Pole Bracket Franco/Perseo 30 Ø 76 mm 500 mm Double
115.12



Pole Franco/Perseo/Dooku h 4500 (+500 mm Inground) mm Ø76 mm
251.6