



### Tau Tube 554 mm Opal Diffuser

Light for installation on wall or ceiling – surface mounted.

Configuration: polycarbonate tube, opal or transparent, with anti-UV filter. Polycarbonate fixing brackets and anodized aluminium closing caps.

Protection Rating: IP65

In compliance with EN 60598-1 standards

Class of insulation: III

Installation: the luminaire is supplied with a screw connector and requires the use of a feeding cable (direct to power supply or for end-to-end connection) to be ordered separately. Parallel wiring required. Maximum end-to-end sequence: 5000mm.

During the installation and the maintenance of the fixtures it is important to be careful and avoid damages on the paint coating.

Damages on the coating exposed to outdoor conditions or water, could cause corrosion.



Chemical substances affect the anticorrosion covering protection.

### Main specifications

|                         |       |                    |                               |
|-------------------------|-------|--------------------|-------------------------------|
| <b>Power (W)</b>        | 3     | <b>Mountings</b>   | Ceiling, Ground, Wall surface |
| <b>System power (W)</b> | 3     | <b>Environment</b> | Outdoor                       |
| <b>CCT (K)</b>          | 4000K |                    |                               |
| <b>CRI</b>              | 80    |                    |                               |
| <b>Net lumen (lm)</b>   | 196   |                    |                               |

### Optical

|                           |                |
|---------------------------|----------------|
| <b>Lighting type</b>      | Direct         |
| <b>LED type</b>           | Power LED      |
| <b>Light distribution</b> | Symmetric      |
| <b>Optical type</b>       | Diffused light |



### Electrical

|                       |                     |                         |     |
|-----------------------|---------------------|-------------------------|-----|
| <b>Frequency (Hz)</b> | 50-60               | <b>Insulation class</b> | III |
| <b>Voltage (V)</b>    | 24                  |                         |     |
| <b>Dimmable</b>       | Yes                 |                         |     |
| <b>Driver type</b>    | Electronic dimmable |                         |     |
| <b>Emergency</b>      | Without             |                         |     |

## Tau Tube 554 mm Opal Diffuser



Supply Cable Tau Tube L 2000 mm  
Single Connector  
172




Supply Cable Tau Tube L 80 mm  
Double Connector  
173



Supply Cable Tau Tube L 200 mm  
Double Connector  
174



Power Supply 8W 100+240Vac/24Vdc  
350mA Ip20  
150

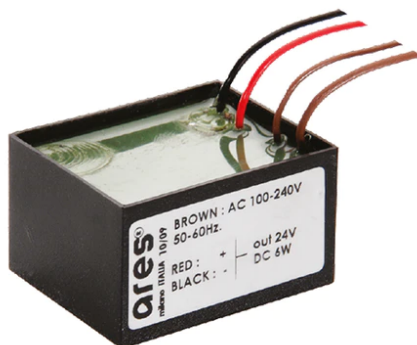

Power Supply 100+240Vac/ 8W at  
24Vdc/ 6W at 350mA Ip65  
106



Power Supply 10W 110+240Vac/24Vdc  
Ip20  
87



Power Supply 10W 110+240Vac/24Vdc  
Ip67  
175



Power Supply 17W 110+240V/24Vdc  
Ip20  
144



Power Supply 17W 110+240V/24Vdc  
Ip67  
176




---

Power Supply Dali 20W  
110+240V/24Vdc Ip67  
252




---

Power Supply 20W 220+240V/24Vdc  
Ip67  
147




---

Power Supply 50W 120+240V/24Vdc  
Ip67  
155




---

Power Supply 70W 220+240V/24Vdc  
Ip67  
110




---

Power Supply 96W 120+277V/24Vdc  
Ip67  
156