



Viviana

10419700.7 - Zinc

Bollard light.

Configuration: hot-dip zinc-coated IPE steel bar (H-frame with base) for high resistance to corrosion. The emission unit, fixed to the upper part of the bar, is composed of a plastic container with zinc-coated cover. Feeding cables are hosted in a hot-dip zinc-coated cover placed on the back side of the bar.

Protection Rating: IP65

In compliance with EN 60598-1 standards

Class of insulation: I



Installation: wiring through two rubber cable glands ($\varnothing < \varnothing < 13\text{mm}$ cables). We recommend installation on a concrete basement or surface, directly with bolts or through the dedicated fixing plate (to be ordered separately).

Main specifications

Power (W)	8	Mountings	Pole
System power (W)	11	Environment	Outdoor
CCT (K)	4000K		
CRI	80		
Net lumen (lm)	448		

Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Asymmetric
Optical type	Diffused light




Electrical

Frequency (Hz)	50-60	Insulation class	I
Voltage (V)	220-240		
Dimmable	No		
Driver type	Not dimmable		
Emergency	Without		

Physical


Color	Zinc
--------------	------



Viviana



Base Plate and Fixing Bolts Viviana
109

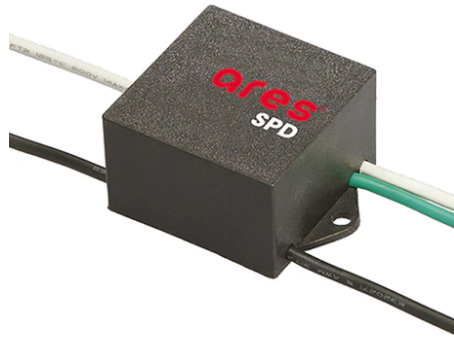

SPD (Surge Protection Device)
237