


## Light Shadow Pro Ø 90 Adjustable Optic Medium

New

■ 03.9942.14 - Black

LED lighting module, with low glare, to be inserted in the recessed frames (not included), installation through a bayonet system with interchangeable spots. Remote driver not included.




### Main specifications

Number of heads	1	Net lumen (lm)	1523
Lamp category	LED	Mountings	Recessed
Power (W)	18W	Environment	Indoor dry location
CCT (K)	4000K		
CRI	90		

### Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Medium
Beam angle (°)	23
Beam angle C90-270 (°)	23

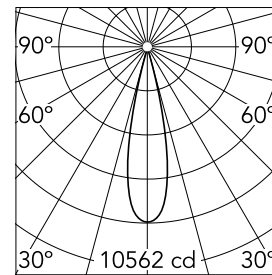

Beam Angle:	23°	
h(m)	E(lx)	D(m)
1	10562	0.41
2	2641	0.83
3	1174	1.24
4	660	1.65
5	422	2.07

Luminous flux luminaire  
1523 lm

### Electrical

Current (mA)	500	Insulation class	III
Dimmable	Yes		
Driver	Remote excluded		
Driver type	Non Dimmable, Dimmable DALI 2, Dimmable, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1, Mains Cut Dimming		
Emergency	Without		

### Physical

Color	Black	Rotation (°)	355
Orientation	Adjustable	Spot diameter (mm)	90
Recessed depth (mm)	111		
Weight (kg)	0.54		
Tilt (°)	35		

## Light Shadow Pro Ø 90 Adjustable Optic Medium



---

Continuous current supply source 240V – 50/60Hz with dimmable DALI 2, push dimming. 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W  
700/750/800/900/950/1000/1050mA-38W  
60.9186

---

Continuous current power supply 220/240V – 50/60Hz. Adjustable Current 300mA-13W / 350mA-15W / 400mA-18W / 450mA-20W / 500mA-22W / 550mA-24W / 600mA-27W / 650mA-29W / 700mA-31W / 750mA-32W / 800mA-33W / 850mA-35W / 900mA-38W / 950mA-40W / 1000/1050mA-42W  
60.9162

---

Continuous current power supply of 13-20W, 110/240V – 50/60Hz with power current selected through adjustable 300 mA – 15W / 350 mA – 18W / 400/450/500/550/600/ 650/700/750/800/850/900 mA – 15W. switch. 0/1-10V or push dimming  
60.9188



---

Continuous current power supply of 12-20W, 110/240V – 50/60Hz with power current selected through adjustable 350mA – 17W / 400mA – 19W / 450 / 550 / 600 / 700mA – 20W regulable Dali 1 y Dali 2  
60.9222

---

Installation Frame Trim  
08.0165.14

---

Continuous current power supply, 0/1-10V dimmable, 220/240V – 50/60Hz, 300mA-16W / 350mA-18W / 400mA-21W / 500mA-27W / 600mA-32W / 650mA-35W / 700/750/800/900/950/1000/1050mA-36W  
60.9439




---

Continuous current power supply,  
Mains dimming, leading & trailing edge  
220/240V – 50/60Hz, 300mA-14W /  
350mA-17W / 400mA-19W /  
450/500/600/650/700/750/800/900mA –  
20W  
60.9467



---

Continuous current power supply,  
dimmable Casambi 220/240V-50/60Hz,  
300mA-16W / 350mA-18,5W / 400mA-  
21,5W / 450mA-24W / 500mA-27W /  
600mA-32W / 650mA-35W / 700mA-36W  
/750/800/900/950/1000/1050/1200mA –  
38W  
60.9207

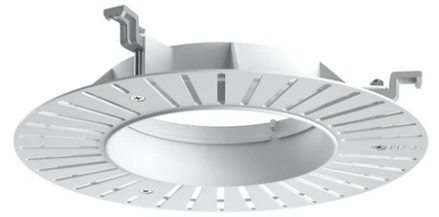

---

Installation Frame No Trim  
08.0167.00



---

Installation Frame Trim  
08.0165.40