



## Easy Kap 80 Square Wall-Washer

■ 03.4218.BU - Blue

Recessed 12V lamp luminaire. Remote transformer not included. Installation frame not necessary.

Recessed 12V lamp luminaire. Remote transformer not included. Installation frame not necessary.

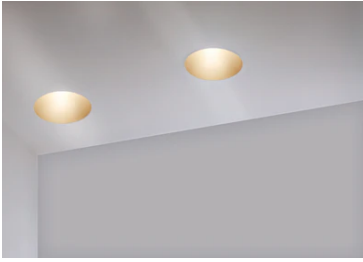


### Main specifications

|                        |                       |                    |        |
|------------------------|-----------------------|--------------------|--------|
| <b>Number of heads</b> | 1                     | <b>Environment</b> | Indoor |
| <b>Lamp category</b>   | Halogen, LED retrofit |                    |        |
| <b>Power (W)</b>       | 50W Max               |                    |        |
| <b>Net lumen (lm)</b>  | 798                   |                    |        |
| <b>Mountings</b>       | Ceiling recessed      |                    |        |

### Optical

|                               |                  |
|-------------------------------|------------------|
| <b>Lighting type</b>          | Indirect, Direct |
| <b>Lamp type</b>              | QR-CBC 51        |
| <b>Light distribution</b>     | Asymmetric       |
| <b>Optical type</b>           | Wall-washer      |
| <b>Beam angle (°)</b>         | 19               |
| <b>Beam angle C90-270 (°)</b> | 19               |



Beam Angle: 19°


| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 3838  | 0.42 |
| 2    | 960   | 0.84 |
| 3    | 426   | 1.27 |
| 4    | 240   | 1.69 |
| 5    | 154   | 2.11 |

Luminous flux luminaire  
848 lm (EXTREME CUT OFF)

### Electrical

|                       |        |                         |            |
|-----------------------|--------|-------------------------|------------|
| <b>Frequency (Hz)</b> | 50/60  | <b>Driver type</b>      | Electronic |
| <b>Voltage (V)</b>    | 12.00  | <b>Emergency</b>        | Without    |
| <b>Lamp holder</b>    | GX5.3  | <b>Insulation class</b> | III        |
| <b>Dimmable</b>       | No     |                         |            |
| <b>Driver</b>         | Remote |                         |            |

### Certification / Marking



### Physical

|                            |       |                           |    |
|----------------------------|-------|---------------------------|----|
| <b>Color</b>               | Blue  | <b>Spot diameter (mm)</b> | 80 |
| <b>Orientation</b>         | Fixed |                           |    |
| <b>Trim</b>                | yes   |                           |    |
| <b>Recessed depth (mm)</b> | 120   |                           |    |
| <b>Weight (kg)</b>         | 0.12  |                           |    |

### Note

Not suitable for lens accessories.

## Easy Kap 80 Square Wall-Washer



---

12V Electronic Transformer 20-70W for  
LED Bulbs and Halogen Lamps  
60.9398

---

12V electronic transformer. 220/240V,  
50/60Hz. 35-105W  
60.9424