





Kap Ø 50 Fixed Optic Flood

■ 05.7302.CU - Copper

Recessed luminaire with LED light source. Power supply not included. Remote power supply to be installed in an accessible place.

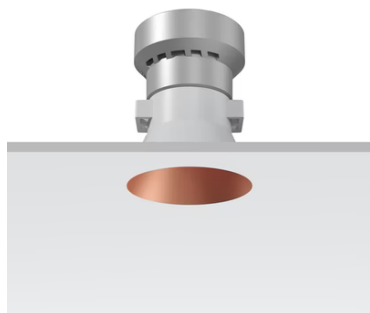


Main specifications

Number of heads	1	CRI	90
Lamp category	LED	Net lumen (lm)	472
Power (W)	7,3W	Mountings	Ceiling recessed
System power (W)	8.6	Environment	Indoor dry location
CCT (K)	2700K		

Optical

Lighting type	Direct
LED type	LED array
Light distribution	Symmetric
Optical type	Flood
Beam angle (°)	49
Beam angle C90-270 (°)	49
UGRL	15
Efficiency (lm/W)	54



Beam Angle: 49°

h(m)	E(lx)	D(m)
1	717	0.91
2	179	1.83
3	80	2.74
4	45	3.66
5	29	4.57

Luminous flux luminaire
472 lm (EXTREME CUT OFF)

Electrical

Voltage (V)	35	Emergency	Without
Current (mA)	200	Insulation class	III
Dimmable	Yes		
Driver	Remote excluded		
Driver type	Non Dimmable, Dimmable DALI 2, Dimmable 0-10V, Dimmable Casambi, Dimmable 1-10V, Dimmable DALI 1, Mains Cut Dimming		

Physical

Color	Copper	Lifespan (L70 B10)	L80B50
Orientation	Fixed		
Recessed depth (mm)	100		
Weight (kg)	0.14		
Spot diameter (mm)	54		

Note

Pre-installation frame. To be ordered separately.


Kap Ø 50 Fixed Optic Flood



Continuous current power supply, 0-10V dimmable, 220/240V – 50/60Hz, 200mA – 20W
60.9483

Continuous current power supply, dimmable DALI 2, 220/240V – 50/60Hz, 200mA – 20W
60.9604

Non dimmable continuous current power supply of 220/240V – 50/60Hz with power current selected through adjustable with switch 200 mA – 8,5W / 300 mA – 13W / 350 mA – 15W / 400 mA – 17,5W / 450 mA – 19,5W / 500 mA – 22W
60.9160



Casambi Controller 220-240V. Remote Installation
60.9392

Continuous current power supply. 220/240V – 50/60Hz. Adjustable Current 150 mA – 7,2W / 200 mA – 9,5W / 250 mA – 12W / 300 mA -14,5W / 350 mA -17W/400 mA – 19,5W / 450 mA -21,5W / 500 mA – 24W. Mains or push dimming
60.9421

Installation frame No Trim
08.9114.00