



## Easy Kap Ø 80 Fixed

■ 03.4210.GL - Gold

Recessed 12V lamp luminaire. Remote transformer not included. Installation frame not necessary.

Recessed 12V lamp luminaire. Remote transformer not included. Installation frame not necessary.

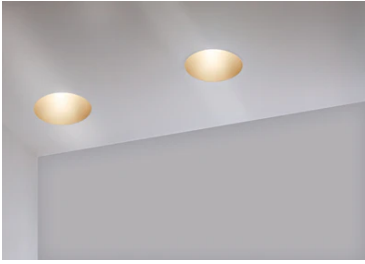


### Main specifications

<b>Number of heads</b>	1	<b>Environment</b>	Indoor dry location
<b>Lamp category</b>	Halogen, LED retrofit		
<b>Power (W)</b>	50W Max		
<b>Net lumen (lm)</b>	710		
<b>Mountings</b>	Ceiling recessed		

### Optical

<b>Lighting type</b>	Direct
<b>Lamp type</b>	QR-CBC 51
<b>Light distribution</b>	Symmetric
<b>Beam angle (°)</b>	19
<b>Beam angle C90-270 (°)</b>	19



<b>Beam Angle:</b>	19°		
	<b>h(m)</b>	<b>E(lx)</b>	<b>D(m)</b>
	1	4634	0.34
	2	1159	0.68
	3	515	1.02
	4	290	1.36
	5	185	1.70

Luminous flux luminaire  
848 lm (EXTREME CUT OFF)

### Electrical


<b>Frequency (Hz)</b>	50/60	<b>Driver type</b>	Electronic 12V
<b>Voltage (V)</b>	12.00	<b>Emergency</b>	Without
<b>Lamp holder</b>	GX5.3	<b>Insulation class</b>	III
<b>Dimmable</b>	No		
<b>Driver</b>	Remote excluded		

### Physical

<b>Color</b>	Gold	<b>Spot diameter (mm)</b>	80
<b>Orientation</b>	Fixed		
<b>Trim</b>	yes		
<b>Recessed depth (mm)</b>	130		
<b>Weight (kg)</b>	0.12		

### Note

Not suitable for lens accessories.



## Easy Kap Ø 80 Fixed



---

12V Electronic Transformer 20-70W for  
LED Bulbs and Halogen Lamps  
60.9398

---

12V electronic transformer. 220/240V,  
50/60Hz. Adjustable by means of  
"leading and trailing edge"  
60.9424