Light Shadow Adjustable Trim Dali Version 4 Spots Optic Medium

03.9320.40ADA - White/White

Recessed integrated luminaire with 4 LED lighting spots. Remote power supply included (220-240V).

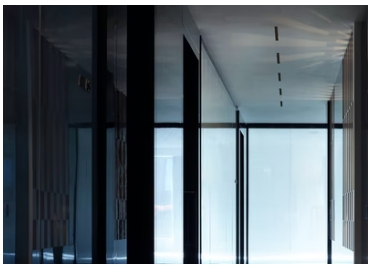



Main specifications

Number of heads	1	**Net lumen (lm)**	744
Lamp category	LED	**Mountings**	Ceiling recessed
Power (W)	10.8W	**Environment**	Indoor dry location
CCT (K)	2700K		
CRI	90		

Optical

Lighting type	Direct
LED type	Power LED
Light distribution	Symmetric
Optical type	Medium
Beam angle (°)	22
Beam angle C90-270 (°)	22



Luminous flux luminaire
744 lm (EXTREME CUT OFF)

Beam Angle: 22°

h(m)	E(lx)	D(m)
1	4970	0.39
2	1243	0.78
3	552	1.17
4	311	1.56
5	199	1.95

Electrical

Frequency (Hz)	50/60	**Emergency**	Without
Voltage (V)	220.00	**Insulation class**	II
Dimmable	Yes		
Driver	Remote included		
Driver type	Dimmable DALI 1		

Physical

Color	White/White	**Tilt (°)**	30
Orientation	Adjustable	**Length (mm)**	156
Trim	yes		
Recessed depth (mm)	75		
Weight (kg)	0.34		

Note

Pre-Installation frame not required.