


## Light Shadow Fixed Trim 12 Spots Optic Spot

03.8850.40A - White/Chrome

Recessed integrated luminaire with 12 LED lighting spots. Remote power supply included (220-240V).

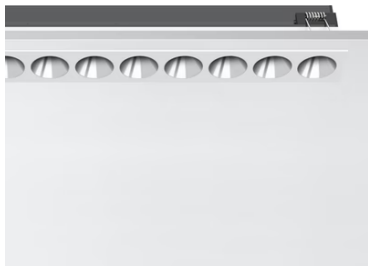


## Main specifications

|                 |       |                |                     |
|-----------------|-------|----------------|---------------------|
| Number of heads | 1     | Net lumen (lm) | 2888                |
| Lamp category   | LED   | Mountings      | Ceiling recessed    |
| Power (W)       | 32.4W | Environment    | Indoor dry location |
| CCT (K)         | 3000K |                |                     |
| CRI             | 90    |                |                     |

## Optical

|                        |           |
|------------------------|-----------|
| Lighting type          | Direct    |
| LED type               | Power LED |
| Light distribution     | Symmetric |
| Optical type           | Spot      |
| Beam angle (°)         | 10        |
| Beam angle C90-270 (°) | 10        |



Beam Angle: 10°

| h(m) | E(lx) | D(m) |
|------|-------|------|
| 1    | 50870 | 0.18 |
| 2    | 12718 | 0.36 |
| 3    | 5652  | 0.55 |
| 4    | 3179  | 0.73 |
| 5    | 2035  | 0.91 |

Luminous flux luminaire  
2888 lm (EXTREME CUT OFF)

## Electrical

|                |                 |                  |    |
|----------------|-----------------|------------------|----|
| Frequency (Hz) | 50/60           | Insulation class | II |
| Voltage (V)    | 220.00          |                  |    |
| Dimmable       | No              |                  |    |
| Driver         | Remote included |                  |    |
| Emergency      | Without         |                  |    |

## Physical

|                     |              |             |     |
|---------------------|--------------|-------------|-----|
| Color               | White/Chrome | Length (mm) | 427 |
| Orientation         | Fixed        |             |     |
| Trim                | yes          |             |     |
| Recessed depth (mm) | 75           |             |     |
| Weight (kg)         | 0.66         |             |     |

## Note

Pre-installation frame not required.